U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

100

ī

8

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) build

Joby all pages of this i		ION A - PROPERTY					ANCE COMPANY USE
A1. Building Owner						Policy Numb	and the second se
Fritz E. and E. Pem		/ay					
A2. Building Street Box No.	Address (inc	luding Apt., Unit, Suite	e, and/or	Bldg. No.) or	P.O. Route and	Company N/	AIC Number:
660 Cedar St.							BLDO
City				State		ZIP Code	C. ERA
Longboat Key				Florida	ал.	34228	OPY FILE PI
	•	nd Block Numbers, Tax of Lot 5, Block 4, Long		Number, Leg	al Description, etc.)	ALC NUMBER:
A4. Building Use (e	.g., Resident	tial, Non-Residential, A	Addition,	Accessory, e	tc.) Residential		
A5. Latitude/Longit	ude: Lat. 27	.435857 N	Long. 82	.681583 W	Horizontal	Datum: 🗌 NAD 1	927 🛛 NAD 1983
A6. Attach at least	2 photograph	ns of the building if the	Certifica	ate is being u	sed to obtain flood	insurance.	
A7. Building Diagra	m Number	6					
A8. For a building	with a crawls	pace or enclosure(s):					
a) Square foot	age of crawls	space or enclosure(s)		1	425.00 sq ft		
b) Number of p	ermanent flo	od openings in the cra	awlspace	or enclosure	(s) within 1.0 foot a	above adjacent gra	de 12
c) Total net are	ea of flood op	enings in A8.b	2	640.00 sq in	REC	CEIVED	
d) Engineered	flood openin	gs? 🛛 Yes 🗌 N	lo		I Linner		
A9. For a building w	ith an attach	ed asrage.			ΔIJ	G-312023	
-				N/A sq ft		LONGBOAT K	
		ed garage				J, Zoning & Building	
		od openings in the att					
c) Total net are	ea of flood op	enings in A9.b		N/A sq	in		
d) Engineered	flood opening	gs? 🗌 Yes 🔀 N	lo				
	SE	CTION B - FLOOD I	NSURA	NCE RATE	MAP (FIRM) INFO	ORMATION	
B1. NFIP Commun	ity Name & C	community Number		B2. County	Name		B3. State
Town of Longboat	Key 125126			Manatee			Florida
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	Effe	M Panel ective/ vised Date	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, use	levation(s) e Base Flood Depth)
12081C0291	F	08-10-2021	08-10-2		AE	9	
		Base Flood Elevation	(BEE) d	ata or hase fl	ood depth entered	in Item B9:	
B10. Indicate the s		Community Deter	mined [Other/Sou	rce:		
						Other/Source:	
		used for BFE in Item E					
B12. Is the buildin	g located in a) area or Otherwis	e Protected Area (OPA)? 🗌 Yes 🔀 No
Designation	Date:		CBRS				
1				1110	aditions		Form Page 1 of



ELEVATION CERTIFICATE			OMB No. 1660 Expiration Date	-0008 e: November 30, 2022
IMPORTANT: In these spaces, copy th	e corresponding information	from Section A.	FOR INSURA	NCE COMPANY USE
Building Street Address (including Apt., 660 Cedar St.	water and the second		Policy Number	and the second
City	State	ZIP Code	Company NAI	C Number
Longboat Key	Florida	34228		
SECTION C	- BUILDING ELEVATION IN	FORMATION (SURVEY R	REQUIRED)	
C1. Building elevations are based on:	Construction Drawings*	Building Under Constr	ruction* 🛛 Fir	nished Construction
*A new Elevation Certificate will be	e required when construction of	the building is complete.		
C2. Elevations – Zones A1–A30, AE, Complete Items C2.a–h below ac				
Benchmark Utilized: BM MCBE 2	2 Vertica	al Datum: NAVD EL14.25		_
Indicate elevation datum used for	the elevations in items a) throug	hh) below.		
🗌 NGVD 1929 🔀 NAVD			a de la compansión de la c	
Datum used for building elevations	s must be the same as that used	d for the BFE.	Check the	measurement used.
a) Top of bottom floor (including l	basement, crawlspace, or enclos	sure floor)	4.5 🔀 fee	
b) Top of the next higher floor	2.2.3.3.5. uddentification (addentification) • State Community - International Community - I		14.8 🔀 fee	et 🔲 meters
c) Bottom of the lowest horizonta	structural member (V Zones or	nlv)	N/A X fee	et meters
 d) Attached garage (top of slab) 			N/A X fee	
 e) Lowest elevation of machinery (Describe type of equipment a) 		ding	15.6 🔀 fee	
f) Lowest adjacent (finished) gra			3.0 🔀 fee	et 🗍 meters
			3.7 🔀 fee	
g) Highest adjacent (finished) gra				
 h) Lowest adjacent grade at lowe structural support 	ist elevation of deck or stairs, inc	cluding	3.7 🔀 fee	et 🗌 meters
SECTION	D – SURVEYOR, ENGINEER,	, OR ARCHITECT CERTI	FICATION	
This certification is to be signed and se I certify that the information on this Ce statement may be punishable by fine of	rtificate represents my best effor	rts to interpret the data avail	by law to certify e lable. I understar	elevation information. Ind that any false
Were latitude and longitude in Section			Check h	here if attachments.
Certifier's Name	License Nu	mber		BURCH
James B. Burchett	LS5701		8:	
Title President		RECEIVEL)) ····	R SALA
Company Name Sampey, Burchett and Knight, Inc.		AUG 3 1 2023		lo. 5701
Address 1570 Global Court	IQ:	WN OF LONGBOAT KE Planning; Zoning & Building	EY A	TATE OF
City	State	ZIP Code	0.1	LORIDA
Sarasota	Florida	34240	and and a second	URVET
Signature	Date	Telephone	Ext.	
Copy all pages of this Elevation Certifica	04-17-2023	· · ·		
Protection and a second			e agent/company,	and (3) building owner.
Comments (including type of equipmen A8. (b) 12 Flood Flap vents, model FF C2.(e) A/C unit on hanger rear of resid	W12, providing 220 sq. ft. of cov		f 2,640 sq. ft of co	overage.
				5

e î

ELEVATION CERTIFICATE			OMB No. 1660-0008 Expiration Date: November 30, 2022
IMPORTANT: In these spaces, copy the correspon	nding information	from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, a 660 Cedar St.	and/or Bidg. No.) o	r P.O. Route and Box I	
City	State	ZIP Code	Company NAIC Number
Longboat Key	Florida	34228	
SECTION E – BUILDING E FOR ZO		DRMATION (SURVE) NE A (WITHOUT BFE	
For Zones AO and A (without BFE), complete Items complete Sections A, B,and C. For Items E1–E4, use enter meters.	E1–E5. If the Cert e natural grade, if	ficate is intended to su available. Check the m	pport a LOMA or LOMR-F request, easurement used. In Puerto Rico only,
 E1. Provide elevation information for the following at the highest adjacent grade (HAG) and the lowes a) Top of bottom floor (including basement, 			whether the elevation is above or below
crawlspace, or enclosure) is		feet [meters above or below the HAG.
b) Top of bottom floor (including basement, crawlspace, or enclosure) is		feet [meters above or below the LAG.
E2. For Building Diagrams 6-9 with permanent floor	d openings provide	ed in Section A Items 8	and/or 9 (see pages 1-2 of Instructions),
the next higher floor (elevation C2.b in the diagrams) of the building is		feet	meters above or below the HAG.
E3. Attached garage (top of slab) is		feet [meters above or below the HAG.
E4. Top of platform of machinery and/or equipment servicing the building is		feet [and E for Zone A (without a FEMA-issued or
E5. Zone AO only: If no flood depth number is availa floodplain management ordinance?	able, is the top of t	he bottom floor elevate nown. The local officia	ed in accordance with the community's Il must certify this information in Section G.
SECTION F - PROPERTY O	WNER (OR OWN	ER'S REPRESENTAT	IVE) CERTIFICATION
The property owner or owner's authorized represent community-issued BFE) or Zone AO must sign here.	ative who complet The statements in	es Sections A, B, and I n Sections A, B, and E	E for Zone A (without a FEMA-issued or are correct to the best of my knowledge.
Property Owner or Owner's Authorized Representati	ve's Name		
Address		City	State ZIP Code
Signature		Date	Telephone
Comments			
			RECEIVED
			RECEIVED
			AUG 3 1 2023
			TOWN OF LONGBOAT KEY Planning, Zoning & Building
			er - string a building
			Check here if attachments.

ŝ.

1.

ELEVATION CERTIFICATE

2

1

0145 Pro - 380-0808 E - caose Duras Novemeras 80 Pruš

		EVATION CERTIFICATE
TO AND INAMOL OCMPTON SIL	An loss tool notice	. 6 589705 903 903 00 3 3 5 5 6 5 8 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
	i national and an	
saimeMic AV shearros		
	107 Y31 2 2 7 1 4 4	
Mannes APPY Conception		
	 The Analysis of Analysis (Rev. 1997) 	
		n 10 p of addition (Carlon Carlon) baserio (C Criawis (Cose) (Cric Saver)
©7 h ∳rt stent ^m t – Lius _		
FAute start 1 sever		
		e, Top of Classics of marks of the Top of States and the States of the S
		анын талаасын алар алар алар алар алар алар алар ала
		Et al.

ELEVATION CERTIFICATE		τ	OMB No. 1660-0008 Expiration Date: November 30, 2022
IMPORTANT: In these spaces, copy the corre	esponding inform	nation from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Su 660 Cedar St.	uite, and/or Bldg. N	No.) or P.O. Route and Box N	Io. Policy Number:
City Longboat Key	State Florida	ZIP Code 34228	Company NAIC Number
		ITY INFORMATION (OPTIO	
The local official who is authorized by law or or Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, en	dinance to admini Certificate. Comp	ster the community's floodpla	ain management ordinance can complete
G1. The information in Section C was take	en from other doc		ned and sealed by a licensed surveyor, cate the source and date of the elevation
G2. A community official completed Secti or Zone AO.	on E for a building	located in Zone A (without a	a FEMA-issued or community-issued BFE)
G3. The following information (Items G4–	G10) is provided f	for community floodplain mar	nagement purposes.
G4. Permit Number	G5. Date Permi	t Issued	G6. Date Certificate of Compliance/Occupancy Issued
G7. This permit has been issued for:] New Construction	on 🗌 Substantial Improveme	ent
G8. Elevation of as-built lowest floor (including of the building:	g basement)	[] feet [] meters Datum
G9. BFE or (in Zone AO) depth of flooding at	the building site:		feet imeters Datum
G10. Community's design flood elevation:		[feet meters Datum
Local Official's Name		Title	
Community Name		Telephone	
Signature		Date	
Comments (including type of equipment and loo	cation, per C2(e),	if applicable)	
			RECEIVED
			AUG' 3 1 2023 TOWN OF LONGBOAT KEY
			Check here if attachments.

4. . . . ^{\$}

ELEVATION CERTIFICATE

· .

BUILDING PHOTOGRAPHS

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy t	he corresponding information	on from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt. 660 Cedar St.	Unit, Suite, and/or Bldg. No.)	or P.O. Route and Box No.	Policy Number:
City	State	ZIP Code	Company NAIC Number
Longboat Key	Florida	34228	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One Caption Front View 04/17/23

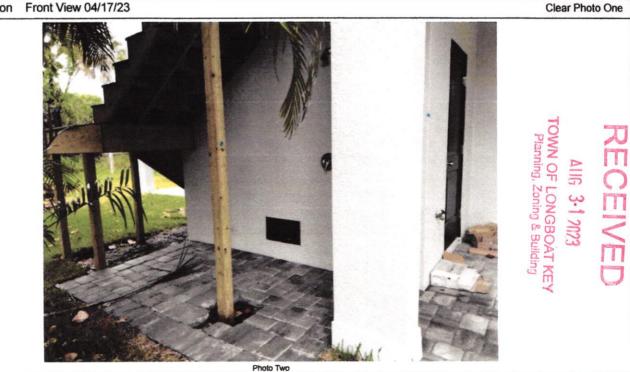


Photo Two Caption Left Side View 04/17/23

ELEVATION CERTIFICATE

en - e be

BUILDING PHOTOGRAPHS

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, co	PORTANT: In these spaces, copy the corresponding information from Section A.					
Building Street Address (including 660 Cedar St.	Apt., Unit, Suite, and/or Bldg. No.)	or P.O. Route and Box No.	Policy Number:			
City	State	ZIP Code	Company NAIC Number			
Longboat Key	Florida	34228				

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three Caption Rear View 04/17/23

Clear Photo Three



Photo Four Caption Right Side View 04/17/23





ICC-ES Evaluation Report

ESR-3560 Reissued September 2020 This report is subject to renewal September 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

DIVISION: 08 00 00—OPENINGS Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWFJ2; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012 and 2009 International Building Code[®] (IBC)
- 2018, 2015, 2012 and 2009 International Residential Code[®] (IRC)

Properties evaluated:

- Physical operation
- Water flow
- Weathering

2.0 USES

Flood Flaps[®] automatic flood vents are used to provide for the equalization of hydrostatic flood forces on exterior walls. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

Flood Flaps® automatic flood vents are engineered mechanically operated flood vents (FVs) that automatically allow flood waters to enter and exit enclosed areas. The FVs are constructed of ABS plastic which serves as the FV's housing, and a front grill that contains an anodized metal screen imbedded in polypropylene plastic. On contact with rising flood water, the grill will disengage from its secured position, allowing flood water and debris to flow through in either direction. The FVs are available in two series as described in Section 3.3.

The sealed series models contain two rubber flaps that close the FV to the passage of air when using with conditioned areas or sealed crawl spaces. In the same manner as the grill, the two rubber flaps are pushed open A Subsidiary of the International Code Council®

by water pressure, allowing water and debris to flow through the FV in either direction. See Figure 1 for an illustration of the Flood Flaps[®] automatic FV.

3.2 Engineered Opening:

The Flood Flaps® automatic FVs comply with the design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 (2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/SEI 24-05 (2012 and 2009 IBC and IRC)] for a rate of rise and fall of 5 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Flood Flaps® automatic FVs must be installed in accordance with Section 4.0.

3.3 Flood Vent Series Models:

Flood Flaps® automatic FVs are available in two series with multiple models and sizes as described in Table 1. The sealed series models, designated FFWF, include two rubber flaps for the prevention of air flow. The multipurpose series, designated FFNF, omits the rubber flaps.

3.4 Natural Ventilation:

Flood Flaps® automatic FV models FFNF12, FFNF08, FFNF05, and FFNF02 have metal screens with 1/4 inch by 1/4 inch (6 mm by 6 mm) openings and provide 37 square inches (0.02 m2) of net free opening to supply natural ventilation for under-floor ventilation. Flood Flaps® automatic FV models FFWF12, FFWF08, and FFWF05 have not been evaluated for use as openings for under-floor ventilation.

4.0 DESIGN AND INSTALLATION

Flood Flaps® automatic FVs are designed to be installed into walls of existing or new construction. Installation of the FVs must be in accordance with the manufacturer's instructions, the applicable code and this report. Flood Flaps® automatic FVs can be installed in wood, masonry and concrete walls up to a thickness of 12 inches (305 mm). In order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 (2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/SEI 24-05 (2012 and 2009 IBC and IRC)], the Flood Flaps® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 220 square feet (20 m²) of enclosed area.

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.



- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305 mm) above grade.

5.0 CONDITIONS OF USE

The Flood Flaps[®] automatic flood vents described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- **5.1** The Flood Flaps[®] automatic FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- **5.2** The Flood Flaps[®] automatic FVs must not be used in place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).

7.0 IDENTIFICATION

- **7.1** The Flood Flaps[®] models recognized in this report are identified by a label bearing the manufacturer's name, the model number, and the evaluation report number (ESR-3560).
- **7.2** The report holder's contact information is the following:

FLOOD FLAPS[®], LLC POST OFFICE BOX 1003 ISLE OF PALMS, SOUTH CAROLINA 29451 (843) 881-0190 www.floodflaps.com info@floodflaps.com

MODEL NUMBER	MODEL DESIGNATION	ROUGH OPENING (Width X Height) (inches)	VENT SIZE (W X H X D) (inches)	ENCLOSED AREA COVERAGE (ff ²)	NET FREE AREA OPENING ¹ (in ²)
 FFWF12	Sealed Series	16 x 8	15 ⁵ / ₈ X 7 ³ / ₄ X 12	220	NA
FFNF12	Multi-Purpose	16 x 8	15 ⁵ / ₈ X 7 ³ / ₄ X 12	220	37
FFWF08	Sealed Series	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 8	220	NA
FFNF08	Multi-Purpose	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 8	220	37
FFWF05	Sealed Series	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 5	220	NA
FFNF05	Multi-Purpose	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 5	220	37

TABLE 1—FLOOD FLAP AUTOMATIC FLOOD VENT MODEL SIZES

For SI: 1 inch = 25.4 mm; 1 ft² = 0.093 m²

¹For under-floor ventilation only.




FIGURE 1—FLOOD FLAPS® AUTOMATIC FLOOD VENT

FFWF12

FFNF08

FFNF05

FIGURE 2—FLOOD FLAPS® AUTOMATIC FLOOD VENT SERIES MODELS



12" DEPTH

FIGURE 3—FLOOD FLAPS® AUTOMATIC FLOOD VENTS MULTIPLE DEPTH OFFERINGS



ICC-ES Evaluation Report

ESR-3560 CBC and CRC Supplement

Issued September 2020 This report is subject to renewal September 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 88—OPENINGS Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Flood Flaps® automatic flood vents, described in ICC-ES evaluation report <u>ESR-3560</u>, has also been evaluated for compliance with the code(*s*) noted below.

Applicable code edition(s):

- 2019 California Building Code (CBC)
- 2019 California Residential Code (CRC)

For evaluation of applicable chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) and Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

2.0 CONCLUSIONS

2.1 CBC:

The Flood Flaps® automatic flood vents, described in Sections 2.0 through 7.0 of the evaluation report <u>ESR-3560</u>, comply with CBC Chapter 12, provided the design and installation are in accordance with the 2018 *International Building Code*[®] (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

2.1.1 OSHPD: The applicable OSHPD Sections of the CBC are beyond the scope of this supplement.

2.1.2 DSA: The applicable DSA Sections of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Flood Flaps® automatic flood vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-3560, comply with 2019 CRC, provided the design and installation are in accordance with the 2018 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report reissued September 2020.





ICC-ES Evaluation Report

ESR-3560 FBC Supplement

Reissued September 2020 This report is subject to renewal September 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS; MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Flood Flaps[®] automatic flood vents, described in ICC-ES evaluation report ESR-3560, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

2.0 CONCLUSIONS

The Flood Flaps flood vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-3560, comply with the *Florida Building Code—Building Code—Building Code—Residential*, provided the design and installation are in accordance with the 2015 *International Building Code*[®] provisions noted in the evaluation report.

Use of the Flood Flaps flood vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the *Florida Building Code—Building* and the *Florida Building Code—Residential*.

For products falling under Florida Rule 9N-3, verification that the report holder's quality-assurance program is audited by a quality-assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official, when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued September 2020.

BLDG PERMIT PLANS FILE Copy of Record

