ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to ide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

				ie ieliennig paş	Jes.	
SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE	
BUILDING OWNER'S NAME VE		POLICY NUMBER				
STREET ADDRESS (Including Ap		COMPANY NAIC NUMBER				
OTHER DESCRIPTION (Lot and Block Numbers, etc.)						
LONGBORT KEY					ZIP CODE	
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION						
Provide the following from the proper FIRM (See Instructions):						
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)	
125126	0010	B	5/18/92	D13	12	
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: feet NGVD (or other FIRM datum—see Section B, Item 7).						
SECTION C BUILDING ELEVATION INFORMATION						
of	AE, AH, and A (with Ent NGVD (or other FIRVE, and V (with BFE) is at an elevation of BFE). The floor used the highest grade addressed and some used as the refer adjacent to the building reduce with the commum system used in dece 2). (NOTE: If the enterpolicy of the property of the prop	BFE). The top of the t	Section B, Item 7). If the lowest horizontal str feet NGVD (or other FIR fice level from the selected uilding. In the selected diagram is depth number is available ain management ordinance above reference level elem to used in measuring the en first to the datum system use No (See Instructions or ction construction dra ling does not yet have the	uctural member of datum—see See didiagram is feet above, is the building's ee? Yes vations: X NGV fevations is differed on the FIRM and Page 4) awings	ction B, Item 7). decision Check B, Item 7). decision Check B, Item 7). decision Check B, Item 7). decision B, Item 7). decisio	
will be required once construction is complete.) The elevation of the lowest grade immediately adjacent to the building is:						
SECTION D COMMUNITY INFORMATION						
the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:						


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME CAURENCE R. WEBER	LICENSE NUMBER (or Affix S	Seal)
TITLE PRESIDENT	COMPANY NAME DEBER ENGINEERI	NG & SURVEYING /NC.
3932 Swift Ka	SORASOTA	R. 3423
SIGNATURE COURCE K. Wire	L DATE / 93	P873/921-3914
Copies should be made of this Certificate for: 1)	community official, 2) insurance agent/co	ompany, and 3) building owner.
COMMENTS:		

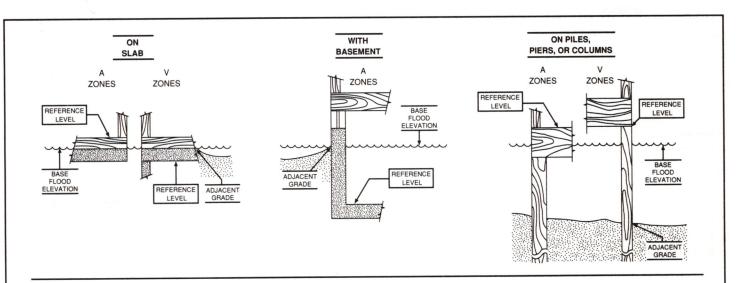

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.