NOV | 6 1994

## **ELEVATION CERTIFICATE**

O.M.B. No 3067-0077 Expires May 31, 1993

FEDERAL EMERGENCY MANAGEMENT AGENCY
NATIONAL FLOOD INSURANCE PROGRAM

BUILDING DEPARTMENT

NATIONAL FLOOD INSURANCE PROGRAM

TTENTION: Userof this dentificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME	POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER  3060 Fair Oaks Lane Grand Box Blvd	COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.)	
Building No. 1 - Grand Bay	70.000
Longboat Key STATE FL	ZIP CODE 34228
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION	
Provide the following from the proper FIRM (See Instructions):	
1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)
125126 0010 B 8-15-83 A-13	11'
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): X NGVD '29 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for the community's BFE: feet NGVD (or other FIRM datum—see Section B, Item 7).	Other (describe on back) or this building site, indicate
SECTION C BUILDING ELEVATION INFORMATION	10 AT 15
<ul> <li>2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected of 16.6 feet NGVD (or other FIRM datum—see Section B, Item 7).</li> <li>(b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the selected diagram, is at an elevation of 16.1 feet NGVD (or other FIRM datum—see Section B, Item Zone A (without BFE). The floor used as the reference level from the selected diagram is 16.0 feet at one) the highest grade adjacent to the building.</li> <li>(d). FIRM Zone AO. The floor used as the reference level from the selected diagram is 16.6 feet at one) the highest grade adjacent to the building. If no flood depth number is available, is the building level) elevated in accordance with the community's floodplain management ordinance? 17.0 feet at one) the elevation datum system used in determining the above reference level elevations: 17.0 NGV under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is differ the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM equation under Comments on Page 2.)</li> </ul>	of the reference level from ection B, Item 7).  I feet above or  ove or below (check is lowest floor (reference)  No Unknown D'29 Other (describe)
Elevation reference mark used appears on FIRM:  Yes  No (See Instructions on Page 4)	
i. The reference level elevation is based on: X actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level for case this certificate will only be valid for the building during the course of construction. A post-construction will be required once construction is complete.)	on Elevation Certificate
The elevation of the lowest grade immediately adjacent to the building is: 6.5 feet NGVD (or Section B, Item 7).	or other FIRM datum-see
SECTION D COMMUNITY INFORMATION	
If the community official responsible for verifying building elevations specifies that the reference level ind is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of floor" as defined by the ordinance is: $\begin{bmatrix} & & & & & & & & & & & & & & & & & & $	f the building's "lowest

## SECTION E CERTIFICATION

MIN A I VOW

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign to certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.


LICENSE NUMBER (or Affix	Seal)
4349	
COMPANY NAME	
Landry & Esber	
CITY	STATE ZIP
Sarasota	FL 34236
/ DATE	PHONE
11/16/94	(813) 955–6004
	4349 COMPANY NAME Landry & Esber CITY Sarasota

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS: Elevation of ground floor (parking) = 7.0'

Reference elevation shown hereon (16.6') is of lobby floor

Elevation of first (living) floor = 29.3'

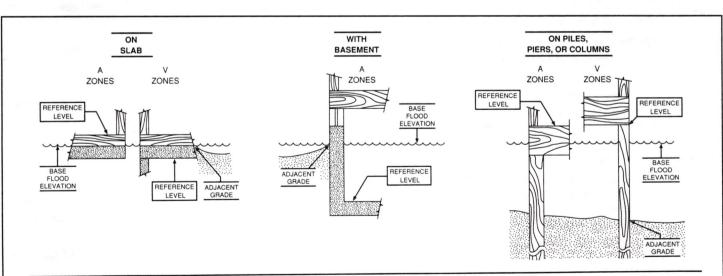

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.