ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to rovide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to setermine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME					POLICY NUMBER
CASET GONZMART					
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER					COMPANY NAIC NUMBER
	OU POINTE.				
OTHER DESCRIPTION (Lot and	Block Numbers, etc.)	UNE N	LO.Z (SAIZASOTA C	and the	
CITY	A DAT ISLES	0211 10	LO. C (DAICHSOIN C	STATE	ZIP CODE
LONGBOAT	KET			FL	34228
	SECTION B FL	OOD INSURA	ANCE RATE MAP (FIRM)	INFORMATION	Marian Comment
Provide the following from t	he proper FIRM (See	Instructions):			Ca VIII
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6 BASE FLOOD ELEVATION
125126	0010	B	8/15/83	A13-	(in AO Zones, use depth)
					Other (describe on back)
8. For Zones A or V, where	no BFE is provided or	n the FIRM, ar	nd the community has esta	ablished a BFE	for this building site, indicate
the community's BFE:	feet N	GVD (or other	FIRM datum-see Section	B, Item A	" " Z "
-	SECTIO	ON C BUILDI	NG ELEVATION INFORM	IATION THE	A 600000
1. Using the Elevation Certi			ram number from the diag	rams found on	Pages 5 and 6 that best
describes the subject but 2(a). FIRM Zones A1-A30,			of the reference level floo	r from the selec	ted diagram is at an elevation
of 15.9 fee	et NGVD (or other FIR	M datum-see	Section B, Item 7).	473	
				uctural member	of the reference level from
the selected diagram,	is at an elevation of		feet NGVD (or other FIR	M datum-see S	Section B, Item 7).
(c). FIRM Zone A (without	BFE). The floor used	as the referen	nce level from the selected	d diagram is	
below (check one)	the highest grade ad	jacent to the b	uilding.	11	
	adjacent to the buildi	ng. If no flood	n the selected diagram is d depth number is available ain management ordinand	e, is the building	g's lowest floor (reference
under Comments on Pag	e 2). (NOTE: If the e	elevation datum	n used in measuring the e	levations is diffe	VD '29 Other (describe erent than that used on and show the conversion
equation under Commen	ts on Page 2.)		_		
4. Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4)					
5. The reference level eleval (NOTE: Use of constructions case this certificate will on will be required once cons	tion drawings is only vally be valid for the buil	alid if the build Iding during th	ding does not yet have the	reference level	I floor in place, in which ction Elevation Certificate
The elevation of the lowe Section B, Item 7).	st grade immediately	adjacent to the	e building is: 6	Z feet NGVD	(or other FIRM datum-see
	SE	CTION D CC	DMMUNITY INFORMATIO	N	
If the community official r is not the "lowest floor" as floor" as defined by the o 2. Date of the start of constr	s defined in the comm rdinance is:	unity's floodpla	ain management ordinand IGVD (or other FIRM datu	e, the elevation	


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME LICENSE NUMBER (or Affix Seal) RALPH J. RHODES FLORIDA P.L.S. # **COMPANY NAME** INDER : RHODES FRESIDENT CITY STATE ZIP SARASOT 34233 DATE PHONE 5/91 (813) 922-78 Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner. COMMENTS: BENCHMARK USED WAS FLORIDA DNR MONUMENT # 17-84-400 PUBLISHED ELEVATION 4.67 (NGVI) 1929

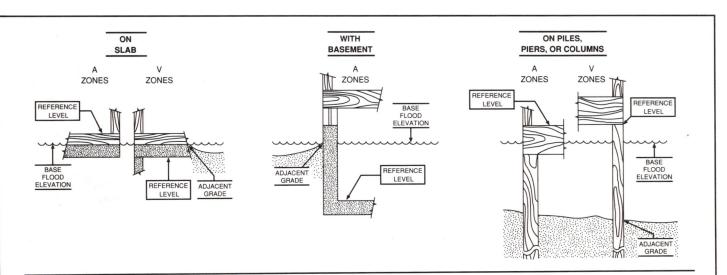

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.