O.M.B. No 3067-0077 Expires May 31, 1993

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

	FOR INSURANCE COMPANY USE							
BUILDING OWNER'S NAME	POLICY NUMBER							
CHRISTOPHER C.MONEUSE STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER COMPANY NAIC NUMBER								
F0.1		COMPANY NAIC NUMBER						
OTHER DESCRIPTION (Lot and I	Slock Numbers, etc.)	rœ.						
LOT 3, SLEEPY	5 50	NO.2						
CITY	STATE	ZIP CODE						
TOWN OF LONG				FLORIDA	34228			
S	SECTION B F	LOOD INSURA	ANCE RATE MAP (FIRM)	INFORMATION				
Provide the following from the proper FIRM (See Instructions):								
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Ziones, use depth)			
125126	0005	"C"	8/15/83	A 13	EL 10			
7. Indicate the elevation date	7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back)							
8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate								
the community's BFE: feet NGVD (or other FIRM datum-see Section B, Item 7).								
	SECTION	ON C BUILDI	NG ELEVATION INFORM	IATION				
 (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The floone) the highest grade level) elevated in accord. Indicate the elevation dature. 	VE, and V (with BFE) is at an elevation of Liber BFE). The floor used the highest grade addressed as the refer adjacent to the build dance with the commum system used in dee 2). (NOTE: If the expression of the system is the system of the sy	. The bottom of	of the lowest horizontal strain feet NGVD (or other FIR nee level from the selected uilding. In the selected diagram is depth number is available ain management ordinance above reference level element used in measuring the entire of the selected in the	M datum—see Sed diagram is Light feet at the property of the set of of	ection B, Item 7). detection B, Item 7). de			
the FIRM [see Section B equation under Comment	l, Item 7], then conve s on Page 2.)	rt the elevation	ns to the datum system us	ed on the FIRM .	and show the conversion			
4. Elevation reference mark				. ,				
5. The reference level elevation is based on: A actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)								
6. The elevation of the lowest grade immediately adjacent to the building is:								
	SE	CTION D CO	MMUNITY INFORMATIO	N				
. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:								


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	LICENSE NUMBER (or Affix Seal)			
VAN STANTON BROWN, SR.	PLS	#4978	BETA COMPANY OF BRADENTON, INC.	
TITLE	COMPANY NAME		PROFESSIONAL SURVEYORS	
PROFESSIONAL LAND SURVEYOR			P.O. BOX 11265	
ADDRESS	CITY ·		BRADENTON, FLORIDA 34282-1265 (813) 751-6016	
SIGNATURE		DATE 1/3/92	PHONE (813) 751-6016	
COMMENTS.				
COMMENTS:				

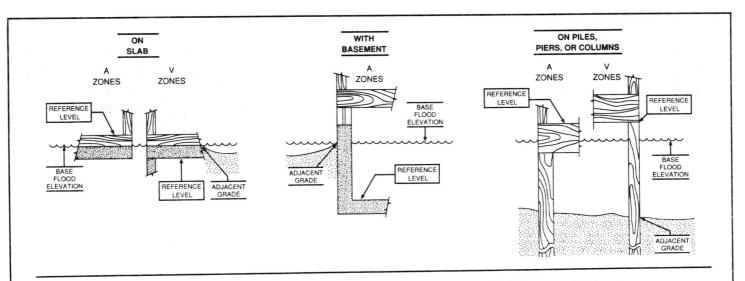

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.