

## **ELEVATION CERTIFICATE**

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

					F3 - C - Party 1			
SECTION A PROPERTY INFORMATION								
	ch & Margare	MAR I	POLICY NUMBER					
597 BAYVIEW DRIVE								
OTHER DESCRIPTION (Lot and I	and a second of the second	nzanada	BUILDING DEPARTMENT TOWN OF LONGBOAT KEY					
CITY				STATE	ZIP CODE			
Longboat Key	OFOTION B. FI	OOD INCUD	NOT DATE MAD /FIDE	FLORIDA	34228			
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION  Provide the following from the proper FIRM (See Instructions):								
Provide the following from the proper FIRM (See Instructions):								
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)			
125126	0005	D	5-18-92	A-13	<u> </u>			
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: feet NGVD (or other FIRM datum—see Section B, Item 7).								
SECTION C BUILDING ELEVATION INFORMATION								
of	et NGVD (or other FIF VE, and V (with BFE) is at an elevation of BFE). The floor used the highest grade action used as the refer adjacent to the build redance with the community turn system used in dig 2). (NOTE: If the element of the page 2).	M datum—see The bottom of the	Section B, Item 7).  of the lowest horizontal and feet NGVD (or other Funce level from the select building.  In the selected diagram of depth number is available and management ordinal above reference level of the selection used in measuring the selection to the datum system.	structural member of IRM datum—see Se ted diagram is is is in the feet about the	ction B, Item 7).  feet above or  ove or below (check is lowest floor (reference)  No Unknown D'29 Other (describe)  cent than that used on			
5. The reference level elevation is based on:  actual construction construction drawings  (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)  6. The elevation of the lowest grade immediately adjacent to the building is:  4. O feet NGVD (or other FIRM datum-see								
Section B, Item 7).								
			OMMUNITY INFORMAT					
If the community official r is not the "lowest floor" a floor" as defined by the o     Date of the start of const	s defined in the commodification	nunity's floodpl	lain management ordina NGVD (or other FIRM da	ince, the elevation of	of the building's "lowest			


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

RODNEY W.MCKINZIE		FL# 4780		
CERTIFIER'S NAME		LICENSE NUMBER (or Affix S	Seal)	
PRESIDENT	Gulf Coast	SURVEYING, IN	IC.	
TITLE	COMPANY NAM	E		
4079 BEE RIDGE ROAD	Sarasota		FLORIDA	34232
ADDRESS POA W.	MEV. CITY	3-10-94	(813) 371 <b>-</b> 59	96
SIGNATURE \	O	DATE	PHONE	
Copies should be made of this Cer				
COMMENTS:			19	1. Ng/A
COMMENTS:				
COMMENTS:				
COMMENTS:				

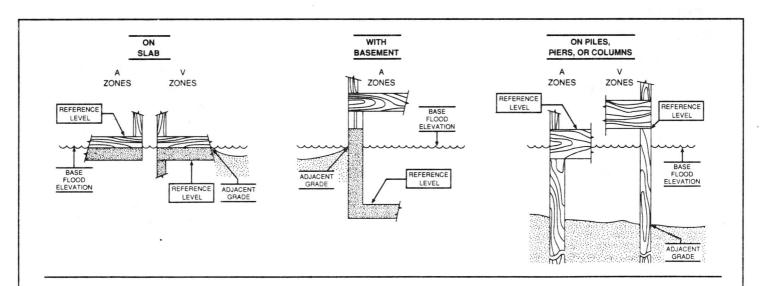

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.