O.M.B. No 3067-007) Expires May 31, 1993

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATT/INTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found an the following pages.

	SECTION A PR	OPERTY INFO	RMATION //D		FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME		1 50 1 10	1411		POLICY NUMBER
STREET ADDRESS (Including Ap	7 // / -/	Number) OR P.O. F	ROUTE AND BOX NUMBER A	PR 4 1994	SOMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and E	Block Numbers, etc.) 23 - 35 -	16	BUILDING TOWN OF	DEPART /	
city Longboo	at key			NG80 HIM	ZIP CODE
	SECTION B FL	OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION	
Provide the following from the	ne proper FIRM (See	Instructions):			
1. COMMUNITY NUMBER '	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)
125126	000 5	C	5 18.92	A 13	//.
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: Literal Li					
SECTION C BUILDING ELEVATION INFORMATION					
(c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The flone) the highest grade level) elevated in accordance in the elevation dat under Comments on Pagethe FIRM [see Section Elevation under Comments on Page 1 (c) (c) (c) (c) (c) (d) (d) (d) (e) (e) (e) (e) (e) (e) (e) (e) (e) (e	VE, and V (with BFE) s at an elevation of LBFE). The floor used the highest grade addressed as the refer adjacent to the build redance with the commum system used in dee 2). (NOTE: If the east on Page 2.) used appears on FIF	d as the referent lijacent to the bearing. If no flood nunity's floodplatermining the elevation datument the elevation	of the lowest horizontal struction feet NGVD (or other FIRITICE level from the selected uilding. In the selected diagram is depth number is available ain management ordinance above reference level elevel are used in measuring the elevel struction of the datum system used. No (See Instructions on	M datum—see Sed diagram is feet above, is the building's e? Yes Nevations: NGVI fevations is different and the FIRM and Page 4)	ction B, Item 7). I feet above or ove or below (check lowest floor (reference No Unknown 0'29 Other (describe ent than that used on
5. The reference level eleval (NOTE: Use of construct case this certificate will or will be required once const. 6. The elevation of the lowe Section B, Item 7).	tion drawings is only to ally be valid for the but struction is complete.)	valid if the build ilding during the	fing does not yet have the e course of construction.	reference level fl A post-construction	oor in place, in which on Elevation Certificate or other FIRM datum-see
	SE	ECTION D CC	MMUNITY INFORMATIO	N	
floor" as defined by the o	s defined in the comn	nunity's floodpl	vations specifies that the re ain management ordinanc IGVD (or other FIRM datu	e, the elevation o	if the building's "lowest


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME LICENSE NUMBER (or Affix Seal) Robert D. Cross #4481 TITLE COMPANY NAME President Bob Cross Professional Land Surveying, P.A. **ADDRESS** 34203^{ZIP} P.O. Box 20755 Bradenton SIGNATURE DATE 746-1512 Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner. COMMENTS:

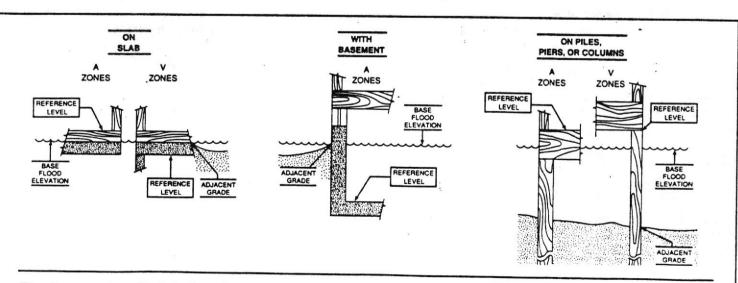

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.