## **ELEVATION CERTIFICATE**

O.M.B. No. 3067-0077 Expires July 31, 1999

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not uired to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

(BLOG3) SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE	
BUILDING OWNER'S NAME					POLICY NUMBER	
BRIAN DEODES STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER					COMPANY NAIC NUMBER	
68 77 GULF OF MEXICO DRIVE					COMPANY NAIC NUMBER	
OTHER DESCRIPTION (Lot and	Block Numbers, etc.)		C.1.2.2.1.1.5.1.1			
	RAMONTO E	STATES S	BUBDIVISION			
LONGBOAT	KEY			FL.	ZIP CODE <b>34228</b>	
	SECTION B FL	OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION	AL A	
rovide the following from t	he proper FIRM (See	Instructions):				
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION	
125126	0005	D	5-18-92	K-X2 13	(in AO Zones, use depth)	
Indicate the elevation da	tum system used on t	he FIRM for Ba	ase Flood Elevations (BFI	E): X NGVD '29	Other (describe on back)	
					or this building site, indicate	
the community's BFE:	feet N	GVD (or other	FIRM datum-see Section	n B, Item 7).	DEGELVE	
	SECTION	ON C BUILDI	NG ELEVATION INFORM	MATION		
of fee (b). FIRM Zones V1-V30, the selected diagram, (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The one) the highest grade level) elevated in acco	et NGVD (or other FIF VE, and V (with BFE) is at an elevation of EBFE). The floor used the highest grade and floor used as the refer adjacent to the build ordance with the commutum system used in dege 2). (NOTE: If the eB, Item 7], then converts on Page 2.)	IM datum—see The bottom of the	Section B, Item 7).  of the lowest horizontal structure in the selected diagram is a depth number is available ain management ordinance above reference level elements to the datum system used in the system is system.	ructural member and datum—see Sed diagram is feet at e, is the building ee? Yes vations: X NGV elevations is differenced on the FIRM	feet above or  ove or below (check s lowest floor (reference  No Unknown  /D '29 Other (describe	
The reference level eleval (NOTE: Use of construct case this certificate will ow will be required once constructed once const	tion drawings is only we find the valid for the bui	valid if the build ilding during the	ding does not yet have the	e reference level		
The elevation of the lower Section B, Item 7).	est grade immediately	adjacent to the	e building is: 4	. 3 feet NGVD	or other FIRM datum-see	
	SE	CTION D CC	MMUNITY INFORMATION	ON		
	s defined in the communication of the communication	nunity's floodpla	vations specifies that the rain management ordinand IGVD (or other FIRM datu	ce, the elevation	_	

## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME

LEO MILLS

TITLE

PROFESSIONAL SURVEYOR & NAPPER

COMPANY NAME

PROFESSIONAL SURVEYOR & NAPPER

LEO MILLS & ASSOC, INC.

CITY

PALMETTO

PATE


PHONE

1-12-98

PHONE

941-722-2460

COMMENTS:

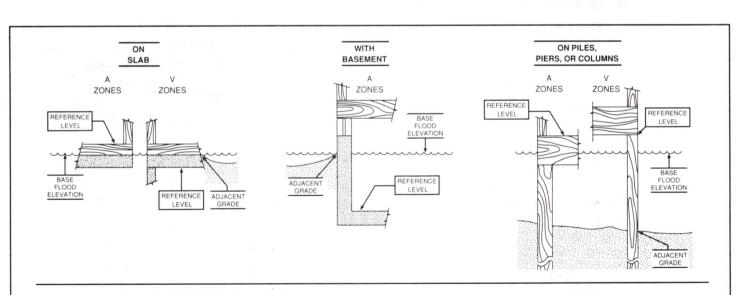

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.

## V-ZONE CONSTRUCTION CERTIFICATE

Name DEDOES RESIDENCE POLICY NO.
Street Address 6877 GULF OF MEXICO PR.
Other Description DEP PERMIT ME. GBI (BULDINGE BP1444)
City LONGBOAT KEY State PLA Zip Code
Section I - Flood Insurance Rate Map Information
COMMAND TY NO. SUPPLE DATE OF RUME SHALL DOME EASE PLOCE ELLY OR AS ZONE, and COMMAND TY ESTIMATED FOR ZONE A COMMAND TY NO. SUPPLE
Section II - Elevation Information
1. Bottom of the Lowest Horizontal Structural Member
SECTION III - V Zone Certification Statement
[ NOTE: This section must be completed by a registered engineer or architect. ]
I certify that based upon development and/or review of structural design.  Specifications, and plans for construction including consideration of the specification, and plans for construction including consideration of the hydrostatic, hydrodynamic and impact loading involved, that the design and hydrostatic, hydrodynamic and impact loading involved, that the design and hydrostatic, hydrodynamic and impact loading involved, that the design and for meeting the following provisions:  The bottom of the lowest horizontal structural member of the lowest floor (excluding the pilings or columns) is elevated to or above the base flood elevation:  The pile or column foundation and structure attached thereto is anchored to resist flotation, collapse and lateral movement due to the effects of wind and water loads acting simultaneously on all building components.
SECTION IV - Breaksway Wall Certification Statement
[ NOTE: This section must be completed by a registered engineer or architect when breakaway walls are used which exceed a design safe loading resistance of 20 pounds per square foot. ]
I certify that based upon development and/or review of structural design, apecifications, and plans for construction that the design and methods of construction of the breakaway walls are in accordance with accepted standards of practice for meeting the following provisions:
Breakaway collapse shall result from a water load less than that which would occur during the base flood; The elevated portion of the building and supporting foundation system shall not be subject to collapse, displacement, or other structural damage due to the effects of wind and water loads acting simultaneously on all building components; The space below the lowest floor is usuable solely for parking of vehicles, building access and storage.
SECTION V - Certification
Certifier's Name TOMAS C. Develow  Title Architect Lidense No. AR 00/2634
Company Name Thomas C. Venglow Avonted
Street Address 2813 RIVERVIEW BUDG
Signature 941.747.8877
Signature the tone