O.M.B. No 3067-0077 Expires May 31, 1993

OLL CLOS OIDE I OIL CONTINUATION

ELEVATION CERTIFICAT

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME	POLICY NUMBER
JAMES P. & CAROLYN VON HUBERTE	
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER	COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.)	
LOT 6, HIDEAWAY BAT (MANATEE COUNTY)	
CITY CITY	STATE ZIP CODE
LONGBOAT KEY	FL
SECTION B FLOOD INSURANCE RATE MAP (FIRM)	INFORMATION
Provide the following from the proper FIRM (See Instructions):	St. 6 - 2 - 2
COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX	5. FIRM ZONE 6. BASE FLOOD ELEVATION (in AO Zones, use depth)
125126 0005 B 8/15/83	A 13 2 TO
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has estal the community's BFE: feet NGVD (or other FIRM datum—see Section	blished a BFE for this building site, indicate
SECTION C BUILDING ELEVATION INFORMATION	
 Using the Elevation Certificate Instructions, indicate the diagram number from the diagram describes the subject building's reference level 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor of i feet NGVD (or other FIRM datum—see Section B, Item 7). (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structure the selected diagram, is at an elevation of feet NGVD (or other FIRM (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected below (check one) the highest grade adjacent to the building. (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is one) the highest grade adjacent to the building. If no flood depth number is available, level) elevated in accordance with the community's floodplain management ordinance. Indicate the elevation datum system used in determining the above reference level elevationer Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevation under Comments on Page 2.) Elevation reference mark used appears on FIRM: Yes No (See Instructions on 5. The reference level elevation is based on: actual construction construction drawings is only valid if the building does not yet have the rease this certificate will only be valid for the building during the course of construction. A will be required once construction is complete.) 	from the selected diagram is at an elevation of the reference level from diagram is a datum—see Section B, Item 7). diagram is feet above or or (check is the building's lowest floor (reference or Yes No Unknown ations: Xelevations is different than that used on the FIRM and show the conversion of
 will be required once construction is complete.) 6. The elevation of the lowest grade immediately adjacent to the building is: 5.6 	
Section B, Item 7).	✓ reet NGVD (or other FIRM datum-see)
SECTION D COMMUNITY INFORMATION	
If the community official responsible for verifying building elevations s is not the "lowest floor" as defined in the community's floodplain mans floor" as defined by the ordinance is: feet NGVD (or floor floor	deaman Ran
FEMA Form 81-31, MAY 90 REPLACES ALL PREVIOUS	

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME

LICENSE NUMBER (or Affix Seal)

TITLE

COMPANY NAME

COMPANY NAME

CITY

STATE


SIGNATURE

DATE

PHONE

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS: ELEVATIONS BASED ON FLORIDA DEPARTMENT OF NATURAL RESOURCES MONUMENT # 13-84-B-10, PUBLISHED ELEVATION 4.95 (NOVD 1929).

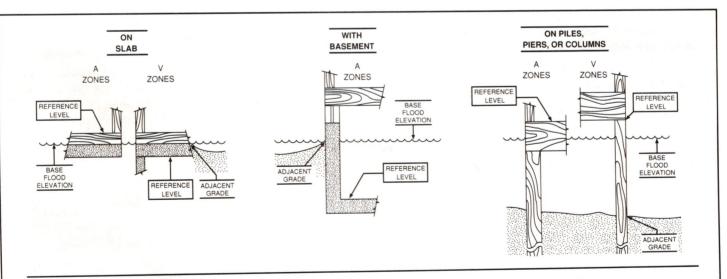

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.