U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB Control No. 1660-0008 Expiration Date: 06/30/2026

nt Agency	Expiration
ram	BLDG PERMIT PLANS
TE	Copy of Record
INCTOUCT	ION DACES ANA

ELEVATION CERTIFICATE

	IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-TH
4.1.	Elevation Continues and all attachments for (1) community official (2) incurance acont/company, and (2) building owner

A1. Building Owner's Name: K and K Longboat LLC Policy Number:Company NAIC Number: A3. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: ZIP Code: 34228 City: Longboat Key State: ZIP Code: 34228 A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Number: Country Club Shores Unit 5 Section 3, Block L, Lot 11 PID# 0009060018 ZIP Code: 34228 A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.): Residential Residential A5. Latitude/Longitude: Lat. 27.350279° Long82.606613° Horiz. Datum: □ NAD 1927 ⊠ NAD 1983 □ WGS 84 A6. Attach at least two and when possible four clear color photographs (one for each side) of the building [see Forn pages 7 and B) A7. Building Diagram Number:3
1215 Bogey Lane City: Longboat Key State: FL ZIP Code: 34228 A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Number: Country Club Shores Unit 5 Section 3, Block L, Lot 11 PID# 0009060018 A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.): Residential A5. Latitude/Longitude: Lat, 27.350279° Long82.606613° A6. Attach at least two and when possible four clear color photographs (one for each side) of the building (see Form pages 7 and B) A7. Building Diagram Number:
A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Number: Country Club Shores Unit 5 Section 3, Block L, Lot 11 PID# 0009060018 A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.): Residential A5. Latitude/Longitude: Lat 27.350279° Long82.606613° Horiz. Datum: □ NAD 1927 ⊠ NAD 1983 □ WGS 84 A6. Attach at least two and when possible four clear color photographs (one for each side) of the building (see Form pages 7 and 8) A7. Building Diagram Number: 3 A8. For a building with a crawlspace or enclosure(s): 1068 sq. ft. TOWN OF LONGBOAT KEY Planning. Zonim & Building b) Is there at least one permanent flood opening on two different sides of each enclosed area? ⊠ Yes □ No □ N/A c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot above adjacent grade: Non-engineered flood openings: 0 Engineered flood openings: 6
Country Club Shores Unit 5 Section 3, Block L, Lot 11 PID# 0009060018 A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.): Residential A5. Latitude/Longitude: Lat. 27.350279° Long82.606613° Horiz. Datum: □ NAD 1927 ⊠ NAD 1983 □ WGS 84 A6. Attach at least two and when possible four clear color photographs (one for each side) of the building tsee Form pages 7 and 8). A7. A7. Building Diagram Number: 3
A5. Latitude/Longitude: Lat. 27.350279° Long82.606613° Horiz. Datum: □ NAD 1927 ⊠ NAD 1983 □ WGS 84 A6. Attach at least two and when possible four clear color photographs (one for each side) of the building tsee Form pages 7 and 8). A7. Building Diagram Number:3
 A6. Attach at least two and when possible four clear color photographs (one for each side) of the building see Forn pages 7 and 8. A7. Building Diagram Number:3
 A7. Building Diagram Number: 3
A8. For a building with a crawlspace or enclosure(s): NOV 0 6 2024 a) Square footage of crawlspace or enclosure(s): 1068 sq. ft. b) Is there at least one permanent flood opening on two different sides of each enclosed area? Image: Control of the state of the st
a) Square footage of crawlspace or enclosure(s): 1068 sq. ft. TOWN OF LONGBOAT KEY Planning, Zoning & Building b) Is there at least one permanent flood openings on two different sides of each enclosed area? ∑ Yes □ No □ N/A c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot above adjacent grade: Non-engineered flood openings:6 Engineered flood openings:6
Planning, Zoning & Building b) Is there at least one permanent flood opening on two different sides of each enclosed area? Yes No XA No No No Planning, Zoning & Building No No No No No No No No Suidding No Suidding No No No Suidding No Suidding No No Suidding Suidding No Suidding Suidding No Suidding No Suidding Suidding Suidding No Suidding Suidding Suidding Suidding Suidding Suidding Suidding Suidding No Suidding Suidding Suidding Suidding No Suidding Su
 c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot above adjacent grade: Non-engineered flood openings:6
Non-engineered flood openings:0 Engineered flood openings:6
d) Total net open area of non-engineered flood openings in A8.c: 0 sq. in.
e) Total rated area of engineered flood openings in A8.c (attach documentation – see Instructions): 1200 sq. ft.
f) Sum of A8.d and A8.e rated area (if applicable – see Instructions): N/A sq. ft.
A9. For a building with an attached garage:
a) Square footage of attached garage: N/A sq. ft.
b) Is there at least one permanent flood opening on two different sides of the attached garage? 🗌 Yes 🗌 No 🛛 🕅 N/A
c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade: Non-engineered flood openings: <u>N/A</u> Engineered flood openings: <u>N/A</u>
d) Total net open area of non-engineered flood openings in A9.c: <u>N/A</u> sq. in.
e) Total rated area of engineered flood openings in A9.c (attach documentation – see Instructions): N/A sq. ft.
f) Sum of A9.d and A9.e rated area (if applicable – see Instructions): N/A sq. ft.
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMATION
B1.a. NFIP Community Name: Town of Longboat Key B1.b. NFIP Community Identification Number: 125126
B2. County Name: Sarasota B3. State: FL B4. Map/Panel No.: 12115C0126 B5. Suffix: G
B6. FIRM Index Date: 03/27/2024 B7. FIRM Panel Effective/Revised Date: 03/27/2024
B8. Flood Zone(s): AE B9. Base Flood Elevation(s) (BFE) (Zone AO, use Base Flood Depth): 8
B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9: □ FIS
B11. Indicate elevation datum used for BFE in Item B9: 🗌 NGVD 1929 🛛 NAVD 1988 🗍 Other/Source:
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? ☐ Yes
B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)? Yes No

ELEVATION CERTIFICATE						
	Unit, Suite, and/or Bldg. No.) or P.O. Route and Box	No.: FOR	INSURANCE COMPANY USE			
1215 Bogey Lane City: Longboat Key		Policy Number:				
		Sec. 1	bany NAIC Number:			
SECTION C	= BUILDING ELEVATION INFORMATION (SURVEY REQU	IRED)			
	Construction Drawings* Building Unde e required when construction of the building is com		☐ Finished Construction			
	AH, AO, A (with BFE), VE, V1–V30, V (with BFE), ow according to the Building Diagram specified in It A 715 Elev.= 7.74' Vertical Datum: NA	em A7. In Puerto				
Indicate elevation datum used for the	elevations in items a) through h) below.					
	ist be the same as that used for the BFE. Conversi- version factor in the Section D Comments area.	on factor used?	☐ Yes ⊠ No Check the measurement used:			
a) Top of bottom floor (including	basement, crawlspace, or enclosure floor):	6.4	feet meters			
b) Top of the next higher floor (se	ee Instructions):	12.1	🛛 feet 🗌 meters			
c) Bottom of the lowest horizonta	I structural member (see Instructions):	N/A	🛛 feet 🗌 meters			
d) Attached garage (top of slab):		N/A	🛛 feet 🗌 meters			
 e) Lowest elevation of Machinery (describe type of M&E and loc 	11.3	🛛 feet 🗌 meters				
f) Lowest Adjacent Grade (LAG)	6.1	🛛 feet 🗌 meters				
g) Highest Adjacent Grade (HAG	6.7	🛛 feet 🗌 meters				
 h) Finished LAG at lowest elevat support: 	7.9	🛛 feet 🗌 meters				
SECTION	D - SURVEYOR, ENGINEER, OR ARCHITE	CT CERTIFICA	TION			
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by state law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.						
Were latitude and longitude in Section A provided by a licensed land surveyor? X Yes No Nov 0.6 2024						
Check here if attachments and describe in the Comments area.						
Certifier's Name: Martin S Britt	License Number: PSM 55	538	1112 Contraction			
Title: Professional Surveyor & Mapper						
Company Name: MSB Surveying, Inc.						
Address: 536 Interstate Court			155588			
City: Sarasota	State: FL ZIP Code: 3	34240	A Town			
Telephone: (941) 341-9935	Ext.: Email: _msb@msbsurveying.com		7/50/2021			
Signature: MatoPrat Date: 07/30/2024 Place Seal Here						
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.						
Comments (including source of conversion factor in C2; type of equipment and location per C2.e; and description of any attachments): 1 story structure on filled stemwall with living above enclosure. A5. determined by LABINS website. A9.a-f) All Engineered openings manufactured by Smart Vent Products Inc., model #1540-520, ICC-ES Report No ESR-2074 (attached). Rated 200sq.in. per unit. C2.e) denotes top of platform for AC units located on rear of structure (see photo Three, Page 8). Structure permitted in Flood Zone AE (10'), Map #12115C0126F, dated 11/04/2016. NOTE: 1 attachment for ICC-ES Report REVISION: 11/05/2024- A7, A8.a-f), A9.a-f), C2.a,b,d) per TLBK comments						

FEMA Form FF-206-FY-22-152 (formerly 086-0-33) (8/23)

		BLDGPE			
	ELEVATION CERTIFICATE	PAGES 1-11 BLDG PERMIT PLAN CODY OF POOL			
Building Street Address (including Apt., Unit, Suite, an 1215 Bogey Lane		FOR INSURANCE COMPANY USE			
	State: FL ZIP Code: 34228	Policy Number: Company NAIC Number:			
	EASUREMENT INFORMATION (SURVEY N , ZONE AR/AO, AND ZONE A (WITHOUT B				
For Zones AO, AR/AO, and A (without BFE), compliantended to support a Letter of Map Change request enter meters.	ete Items E1–E5. For Items E1–E4, use natural g	rade, if available. If the Certificate is			
Building measurements are based on: Construction Certificate will be required when a		* Finished Construction			
E1. Provide measurements (C.2.a in applicable Bu measurement is above or below the natural HA		propriate boxes to show whether the			
 a) Top of bottom floor (including basement, crawlspace, or enclosure) is: 	feet meters	above or below the HAG.			
 b) Top of bottom floor (including basement, crawlspace, or enclosure) is: 	feet meters	above or below the LAG.			
E2. For Building Diagrams 6–9 with permanent floo next higher floor (C2.b in applicable Building Diagram) of the building is:	od openings provided in Section A Items 8 and/or	9 (see pages 1–2 of Instructions), the ☐ above or ☐ below the HAG.			
E3. Attached garage (top of slab) is:	[] feet [] meters	above or below the HAG.			
E4. Top of platform of machinery and/or equipmen servicing the building is:	t feet meters	above or below the HAG.			
E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in accordance with the community's floodplain management ordinance? Yes No Unknown The local official must certify this information in Section G.					
SECTION F - PROPERTY OWNER	OR OWNER'S AUTHORIZED REPRESENT	ATIVE) CERTIFICATION			
The property owner or owner's authorized represent sign here. <i>The statements in Sections A, B, and E a</i>	are correct to the best of my knowledge	ne A (without BFE) or Zone AO must			
Check here if attachments and describe in the C					
Property Owner or Owner's Authorized Representa					
Address: City:		ZIP Code:			
	Email:				
Signature:	Date:				
Comments:					
	RE	CEIVED			
		NOV 0 6 2024			
	TOWN	OF LONGBOAT KEY ing, Zoning & Building			

IMPORTANT	ELEVATION C MUST FOLLOW THE INSTRU		RUCTIO	N PAGES 1-1	1		
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:				FOR INSURANCE COMPANY USE			
1215 Bogey Lane				Policy Num	nber:		
City: Longboat Key State: FL ZIP Code: 34228				Company N	NAIC Number:		
SECTION G - COMMUNITY	INFORMATION (RECOMMI	ENDED FOR COM		TY OFFICIA	L COMPLETION)		
The local official who is authorized by I Section A, B, C, E, G, or H of this Elev					dinance can complete		
G1. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by state law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.)							
	G2.a. A local official completed Section E for a building located in Zone A (without a BFE), Zone AO, or Zone AR/AO, or when item E5 is completed for a building located in Zone AO.						
G2.b. A local official completed S	ection H for insurance purposes	•					
G3. In the Comments area of S	ection G, the local official descri	bes specific correction	ons to t	he information	in Sections A, B, E and H.		
G4.	Items G5–G11) is provided for co	ommunity floodplain	manag	ement purpos	es.		
G5. Permit Number:	G6. Date Perm	nit Issued:					
G7. Date Certificate of Compliance	/Occupancy Issued:						
G8. This permit has been issued fo	r: New Construction St	ubstantial Improvem	ent				
G9.a. Elevation of as-built lowest floo building:	or (including basement) of the	[feet	meters	Datum:		
G9.b. Elevation of bottom of as-built member:	lowest horizontal structural	C] feet	meters	Datum:		
G10.a. BFE (or depth in Zone AO) of f	looding at the building site:		feet	meters	Datum:		
G10.b. Community's minimum elevation requirement for the lowest floor member:			feet	meters	Datum:		
G11. Variance issued? Yes [No If yes, attach document	ation and describe in	n the Co	omments area	•		
The local official who provides information in Section G must sign here. I have completed the information in Section G and certify that it is correct to the best of my knowledge. If applicable, I have also provided specific corrections in the Comments area of this section.							
Local Official's Name:		Title:					
NFIP Community Name:							
Telephone:	Ext.: Email:						
Address:							
City:		Sta	ate:	ZIP C	ode:		
Signature:		Date:					
Comments (including type of equipment and location, per C2.e; description of any attachments; and corrections to specific information in Sections A, B, D, E, or H):							
Sections A, B, D, E, or H):		REU	Lane I	W ihanan Beref			
			N R 2				
		TOWN OF	LONG Zoning	BOAT KEY & Building			
	,						

	ELEVATION CERTIFICAT	
	Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Bo	FOR INCURANCE COMPANY USE
City: Longboat Key	State: FL ZIP Code: 3422	28 Policy Number:
	H – BUILDING'S FIRST FLOOR HEIGHT INFO SURVEY NOT REQUIRED) (FOR INSURANCE I	
to determine the building's first fl nearest tenth of a foot (nearest to	horized representative, or local floodplain management oor height for insurance purposes. Sections A, B, and enth of a meter in Puerto Rico). <i>Reference the Found</i> ate Building Diagrams (at the end of Section I Instr	I must also be completed. Enter heights to the dation Type Diagrams (at the end of Section H
H1. Provide the height of the top	o of the floor (as indicated in Foundation Type Diagram	ns) above the Lowest Adjacent Grade (LAG):
a) For Building Diagrams floor (include above-grade fl crawlspaces or enclosure flo		☐ feet ☐ meters ☐ above the LAG
	2A, 2B, 4, and 6–9. Top of next	☐ feet ☐ meters ☐ above the LAG
	nent servicing the building (as listed in Item H2 instruc ndation Type Diagrams at end of Section H instruction	
SECTION I - PROP	PERTY OWNER (OR OWNER'S AUTHORIZED F	REPRESENTATIVE) CERTIFICATION
indicate in Item G2.b and sign Se Check here if attachments ar Property Owner or Owner's Auth Address:	e provided (including required photos) and describe ea	ach attachment in the Comments area.
City:		State: ZIP Code:
Telephone:	Ext.: Email:	
Signature:	Date:	
Comments:		
	Town Plann	RECEIVED NOV N & 2024 NOF LONGBOAT KEY ning, Zoning & Building

I

ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 BUILDING PHOTOGRAPHS

See Instructions for Item A6.

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 1215 Bogey Lane		FOR INSURANCE COMPANY USE	
FL.	ZIP Code: 34228	Policy Number: Company NAIC Number:	
	3ldg. No.) :FL		


Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo One

Photo One Caption: (07/30/2024) Front View with 3 Flood Vents on Enclosure Wall

Clear Photo One

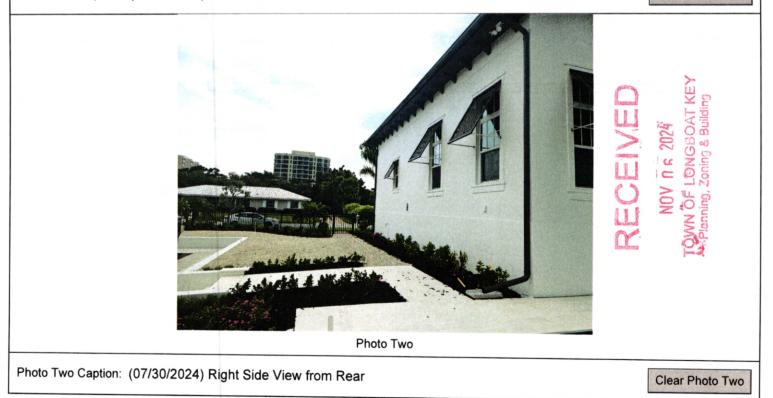

ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 COPY OF Record

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:			FOR INSURANCE COMPANY USE	
1215 Bogey Lane City: Longboat Key	State:	FL	ZIP Code: 34228	Policy Number: Company NAIC Number:
Incart the third and fourth photomer	ha halaw Idaatif all al			

Insert the third and fourth photographs below. Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo Three

Photo Three Caption: (07/30/2024) Rear View from Left Side with Elevated AC Units & Water Heater

Clear Photo Three





Most Widely Accepted and Trusted

ICC-ES Evaluation Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2023 This report is subject to renewal 02/2025.

DIVISION: 08 00 00-OPENINGS SECTION: 08 95 43-VENTS/FOUNDATION FLOOD VENTS



RECEI TOWN OF LONGBOAT KEY

Planning, Zoning & Building


REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526





ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

Copyright [©] 2023 ICC Evaluation Service, LLC. All rights reserved.











I-Codes provide recognition in all 50 states

Specialty code recognition

www.icc-es.org | (800) 423-6587 | (562) 699-0543

ICC-ES Evaluation Report ESR-2074

DIVISION: 08 00 00-OPENINGS Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2021 and 2018 International Energy Conservation Code[®] (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow
- 2.0 **USES**

The Smart Vent[®] units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing

Reissued February 2023

This report is subject to renewal February 2025.

the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT[®] Model #1540-510 and SmartVENT[®] Overhead Door Model #1540-514 both have screen covers with 1/4-inch-by-1/4-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs described in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT[®] Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 - 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT[®] and FloodVENT[®]:

SmartVENT[®] and FloodVENT[®] are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.



A Subsidiary of the International Code Council®

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the Stacking Model #1540-511 SmartVENT[®] and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 I/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the

manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.

5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit described in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:


SMART VENT PRODUCTS, INC. **19 MANTUA ROAD MOUNT ROYAL, NEW JERSEY 08061** BLDG PERMIT PLANS CODY OF Record (877) 441-8368 www.smartvent.com

info@smartvent.com

MODEL NAME	MODEL	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ /4" X 7 ³ /4"	200
SmartVENT®	1540-510	15 ³ /4" X 7 ³ /4"	200
FloodVENT [®] Overhead Door	1540-524	15 ³ /4" X 7 ³ /4"	200
SmartVENT [®] Overhead Door	1540-514	15 ³ /4" X 7 ³ /4"	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ /4"	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ /4"	200
SmartVENT [®] Stacker	1540-511	16" X 16"	400
FloodVent [®] Stacker	1540-521	16" X 16"	400

TABLE 1-MODEL SIZES

For SI: 1 inch = 25.4 mm; 1 square foot = m²

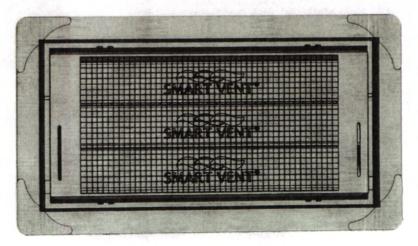

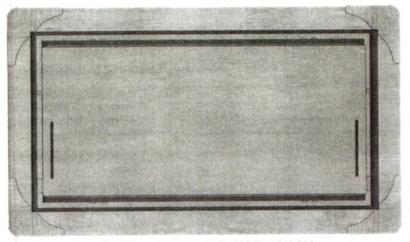


FIGURE 2-SMART VENT MODEL 1540-520

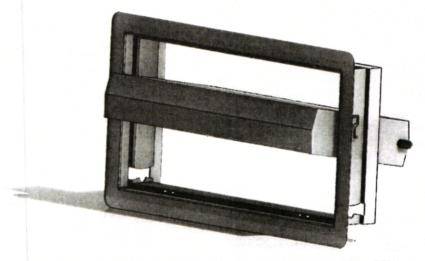


FIGURE 3-SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

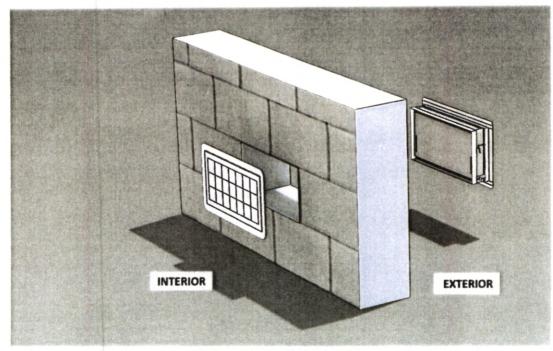


FIGURE 4-FLOOD VENT SEALING KIT



ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Reissued February 2023 This report is subject to renewal February 2025.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

BLDG PERMIT PLANE Copy of Record 11; SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

Applicable code editions:

2019 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) AKA: California Department of Health Care Access and Information (HCAI) and the Division of State Architect (DSA). see Sections 2.1.1 and 2.1.2 below.

2019 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with 2019 CBC Chapter 12, provided the design and installation are in accordance with the 2018 International Building Code® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

2.1.1 OSHPD:

The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.

2.1.2 DSA:

The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2019 CRC, provided the design and installation are in accordance with the 2018 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2023.

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





ICC-ES Evaluation Report

ESR-2074 FBC Supplement

Reissued February 2023 This report is subject to renewal February 2025.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2020 Florida Building Code—Building
- 2020 Florida Building Code—Residential

2.0 CONCLUSIONS

The Smart Vent[®] Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the *Florida Building Code—Building* and the *Florida Building Code—Residential*, provided the design requirements are determined in accordance with the *Florida Building Code—Building* or the *Florida Building Code—Residential*, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-2074 for 2018 International Building Code[®] meet the requirements of the *Florida Building Code—Building* or the *Florida Building Code*.


Use of the Smart Vent[®] Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the *Florida Building Code—Building* and the *Florida Building Code—Residential*.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued February 2023.



TRA TRA	NSMITTAL FORM	BLOG Pro
Some - Ca E		Copy FILE PLANS
Plannin Diamin	Town of Longboat Key	Record
Plannin	g, Zoning & Building Department 501 Bay Isles Road	*
· L	ongboat Key, Florida 34228	
	941-316-1966 941-316-1970 Fax	
DATE: 11 6 2024 ATTN:	ne XXII	•
FROM: Melissa Andrews		
Company: Nutter Custom Constru	etion	
Phone: 944.924.1868 x201 En	nail: Melissa e nutter custor	nconstruction
		'iem
SITE LOCATION/ADDRESS: 1215 Boge	Jln	
PERMIT NUMBER: PB22 - 0353		
THE FOLLOWING IS SUBMITTED FOR CONSID	ERATION BY PZB STAFF	
RESPONSE TO COMMENTS		
REVISIONS / RE-SUBMITTALS		
APPLICABLE CODES / TRAD	ES (Check All That Apply) [,]	
	· · · · · · · · · · · · · · · · · · ·	MBING
ITEMS INCLUDED IN THIS TRANSMITTAL:		

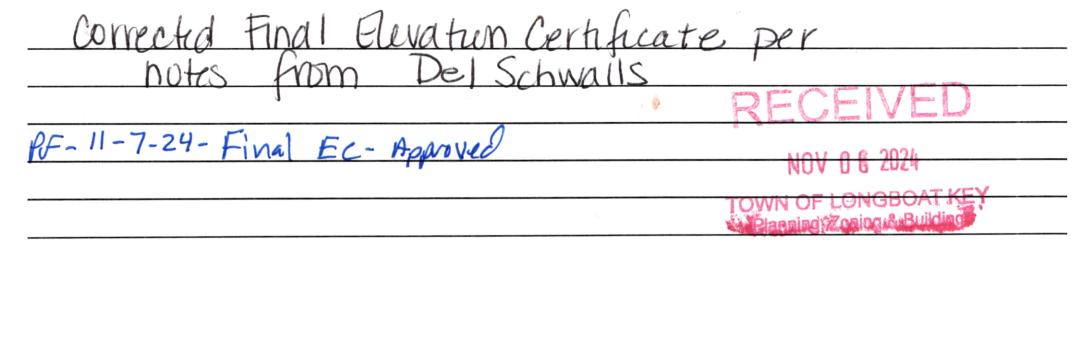

and the second