#### U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

ELEVATION CERTIFICATE

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
A1. Building Owner's Name: GLASS FAMILY LIVING TRUST	Policy Number:
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 501 HARBOR POINT ROAD	Company NAIC Number:
City: TOWN OF LONGBOAT KEY State: FL	ZIP Code: 34228
A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Nur LOT 40 BAY ISLES UNIT 1, PID#0009030002	mber:
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.): RESIDENTIAL	
A5. Latitude/Longitude: Lat. 27.352936 Long. (-)82.609367 Horizontal Datum:	IAD 1927 ⊠NAD 1983 □ WGS 84
A6. Attach at least two and when possible four clear photographs (one for each side) of the building	g (see Form pages 7 and 8).
A7. Building Diagram Number:8	900 V Land V Land V Land L
A8. For a building with a crawlspace or enclosure(s):	SEP 1 3 2023
a) Square footage of crawlspace or enclosure(s): 3,255.00 sq. ft.	TOWN OF LONGBOAT K
b) Is there at least one permanent flood opening on two different sides of each enclosed area?	Yes Noning Appling & Building
c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot Non-engineered flood openings:0 Engineered flood openings:24	above adjacent grade:
d) Total net open area of non-engineered flood openings in A8.c: 0.00 sq. in.	
e) Total rated area of engineered flood openings in A8.c (attach documentation - see Instruction	ons): 4,800.00 sq. ft.
f) Sum of A8.d and A8.e rated area (if applicable – see Instructions): sq. ft.	
A9. For a building with an attached garage:	
a) Square footage of attached garage: 678.00 sq. ft.	
b) Is there at least one permanent flood opening on two different sides of the attached garage?	Yes □ No □ N/A
c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adja Non-engineered flood openings:0 Engineered flood openings:5	acent grade:
d) Total net open area of non-engineered flood openings in A9.c: 0.00 sq. in.	
e) Total rated area of engineered flood openings in A9.c (attach documentation - see Instruction	ons):1,000.00 sq. ft.
f) Sum of A9.d and A9.e rated area (if applicable – see Instructions): sq. ft.	
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFOR	RMATION
B1.a. NFIP Community Name: TOWN OF LONGBOAT KEY  B1.b. NFIP Community Ide	ntification Number: 125126
B2. County Name: SARASOTA B3. State: FL B4. Map/Panel No.:	12115C0126 B5. Suffix: F
B6. FIRM Index Date: 11/04/2016 B7. FIRM Panel Effective/Revised Date: 11/04/20	16
B8. Flood Zone(s): AE B9. Base Flood Elevation(s) (BFE) (Zone AO, use B	Base Flood Depth): 10
B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9:  FIS FIRM Community Determined Other:	
B11. Indicate elevation datum used for BFE in Item B9:   NGVD 1929  NAVD 1988  Other	/Source:
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protection Designation Date:	ected Area (OPA)? Yes No
B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)?	No

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
501 HARBOR POINT ROAD	Policy Number:
City: TOWN OF LONGBOAT KEY State: FL ZIP Code: 34228	Company NAIC Number:
SECTION C - BUILDING ELEVATION INFORMATION (SUR)	/EY REQUIRED)
C1. Building elevations are based on:  Construction Drawings* Building Under ConstA new Elevation Certificate will be required when construction of the building is complete.	_
C2. Elevations – Zones A1–A30, AE, AH, AO, A (with BFE), VE, V1–V30, V (with BFE), AR, A A99. Complete Items C2.a–h below according to the Building Diagram specified in Item A7 Benchmark Utilized: NGS DATAPOINT A715 Vertical Datum: NAVD 19	7. In Puerto Rico only, enter meters.
Indicate elevation datum used for the elevations in items a) through h) below.  ☐ NGVD 1929 ☑ NAVD 1988 ☐ Other:	
Datum used for building elevations must be the same as that used for the BFE. Conversion fac If Yes, describe the source of the conversion factor in the Section D Comments area.	tor used? Yes No  Check the measurement used:
a) Top of bottom floor (including basement, crawlspace, or enclosure floor):	10.00 Seet meters
b) Top of the next higher floor (see Instructions):	22.00 🛛 feet 🗌 meters
c) Bottom of the lowest horizontal structural member (see Instructions):	0.00 🛛 feet 🗌 meters
d) Attached garage (top of slab):	5.30 🛛 feet 🗌 meters
e) Lowest elevation of Machinery and Equipment (M&E) servicing the building (describe type of M&E and location in Section D Comments area):	11.50 🛛 feet 🔲 meters
f) Lowest Adjacent Grade (LAG) next to building:   Natural  Finished	5.10 🛛 feet 🗌 meters
g) Highest Adjacent Grade (HAG) next to building:   Natural  Finished	6.00 🛛 feet 🗌 meters
h) Finished LAG at lowest elevation of attached deck or stairs, including structural support:	5.10 🛭 feet 🔲 meters
SECTION D – SURVEYOR, ENGINEER, OR ARCHITECT C	ERTIFICATION
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorize information. I certify that the information on this Certificate represents my best efforts to interpretable statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.	et the data available. I understand that any
Were latitude and longitude in Section A provided by a licensed land surveyor? ☐ Yes ☐ N	
Check here if attachments and describe in the Comments area.	TOWN OF LONGBOAT KEY Planning, Zoning & Building
Certifier's Name: JAMES B AMBERGER License Number: PSM 6333	MINIMALIA AMBONIA
Title: PRESIDENT	INTERNE NUMBER PHILIP
Company Name: JIM AMBERGER LAND SURVEYING, LLC	6333
Address: 1055 S. TAMIAMI TRAIL SUITE 110-B	
City: SARASOTA State: FL ZIP Code: 34236	STATE OF FLORIDA
James B  Objitally signed by James B  Amberger  Amberger	6333  STATE OF FLORIDA  STATE OF FLORIDA  STATE OF FLORIDA  SURveyor Sedining
Signature: Amberger   Date: 2023.09.12 07:28:05 -04'00'   Date: 09/12/202	Place Seal Here
Telephone: (941) 955-6333 Ext.: Email: bergertime@verizon.net	
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insura	
Comments (including source of conversion factor in C2; type of equipment and location per C2 A8/9 & C2a-h: 0.0=N/A C2e: A/C EQUIPMENT LOCATED ON NORTHEASTERLY SIDE OF RESIDENCE	e; and description of any attachments).

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE			
501 HARBOR POINT ROAD	Policy Number:			
City: TOWN OF LONGBOAT KEY State: FL ZIP Code: 34228	Company NAIC Number:			
SECTION E – BUILDING MEASUREMENT INFORMATION (SURVEY NOT REQUIRED)  FOR ZONE AO, ZONE AR/AO, AND ZONE A (WITHOUT BFE)				
For Zones AO, AR/AO, and A (without BFE), complete Items E1–E5. For Items E1–E4, use natural intended to support a Letter of Map Change request, complete Sections A, B, and C. Check the me enter meters.	grade, if available. If the Certificate is asurement used. In Puerto Rico only,			
Building measurements are based on: Construction Drawings* Building Under Construction* A new Elevation Certificate will be required when construction of the building is complete.	on* Finished Construction			
E1. Provide measurements (C.2.a in applicable Building Diagram) for the following and check the a measurement is above or below the natural HAG and the LAG.	appropriate boxes to show whether the			
a) Top of bottom floor (including basement, crawlspace, or enclosure) is:	above or below the HAG.			
b) Top of bottom floor (including basement, crawlspace, or enclosure) is:	above or below the LAG.			
E2. For Building Diagrams 6–9 with permanent flood openings provided in Section A Items 8 and/onext higher floor (C2.b in applicable Building Diagram) of the building is:	or 9 (see pages 1–2 of Instructions), the			
E3. Attached garage (top of slab) is:				
E4. Top of platform of machinery and/or equipment servicing the building is:	☐ above or ☐ below the HAG.			
E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in a floodplain management ordinance?  Yes No Unknown The local official mi	ccordance with the community's ust certify this information in Section G.			
SECTION F - PROPERTY OWNER (OR OWNER'S AUTHORIZED REPRESEN	ITATIVE) CERTIFICATION			
The property owner or owner's authorized representative who completes Sections A, B, and E for Z sign here. The statements in Sections A, B, and E are correct to the best of my knowledge	one A (without BFE) or Zone AO must			
Check here if attachments and describe in the Comments area.				
Property Owner or Owner's Authorized Representative Name:				
Address:				
City: State:	ZIP Code:			
Signature: Date:				
Telephone: Ext.: Email:				
Comments:				
R	ECEIVED			
	SEP 1 3 2023			
TOW Pla	N OF LONGBOAT KEY			
	-			

**IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19** 

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:	E
501 HARBOR POINT ROAD  City: TOWN OF LONGBOAT KEY  State: FL ZIP Code: 34228  Policy Number:	
City: TOWN OF LONGBOAT KEY  State: FL ZIP Code: 34228  Company NAIC Number:	
SECTION G - COMMUNITY INFORMATION (RECOMMENDED FOR COMMUNITY OFFICIAL COMPLETION)	
The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Section A, B, C, E, G, or H of this Elevation Certificate. Complete the applicable item(s) and sign below when:	
G1. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by state law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.)	
G2.a. A local official completed Section E for a building located in Zone A (without a BFE), Zone AO, or Zone AR/AO, or when item E5 is completed for a building located in Zone AO.	
G2.b.   A local official completed Section H for insurance purposes.	
G3. In the Comments area of Section G, the local official describes specific corrections to the information in Sections A, B, E and	H.
G4.	
G5. Permit Number: G6. Date Permit Issued:	
G7. Date Certificate of Compliance/Occupancy Issued:	
G8. This permit has been issued for: New Construction Substantial Improvement	
G9.a. Elevation of as-built lowest floor (including basement) of the building:	_
G9.b. Elevation of bottom of as-built lowest horizontal structural member: feet meters Datum:	_
G10.a. BFE (or depth in Zone AO) of flooding at the building site:	
G10.b. Community's minimum elevation (or depth in Zone AO) requirement for the lowest floor or lowest horizontal structural member:	
	_
G11. Variance issued? Yes No If yes, attach documentation and describe in the Comments area.	
The local official who provides information in Section G must sign here. I have completed the information in Section G and certify that it is correct to the best of my knowledge. If applicable, I have also provided specific corrections in the Comments area of this section.	5
Local Official's Name: Title:	_
NFIP Community Name:	_
Telephone: Ext.: Email:	
Address:	_
City: State: ZIP Code:	_
Signature: Date:	
Comments (including type of equipment and location, per C2.e; description of any attachments; and corrections to specific information in Sections A, B, D, E, or H):	
SEP 1 3 2023	
TOWN OF LONGBOAT KEY Planning, Zoning & Building	

FEMA Form FF-206-FY-22-152 (formerly 086-0-33) (10/22)

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

Building Street Add	ress (including Apt., Unit, Suite	e, and/or Bldg. No.)	or P.O. Route and Box No.:	FOR INSUR	ANCE COMPANY USE
501 HARBOR P	OINT ROAD			Policy Number	er:
City: TOWN OF	LONGBOAT KEY	State:FL	_ ZIP Code: 34228	Company NA	AIC Number:
			R HEIGHT INFORMATIO		IES
to determine the b	er, owner's authorized represe uilding's first floor height for ir foot (nearest tenth of a meter the appropriate Building D	in Puerto Rico). Re	Sections A, B, and I must als eference the Foundation Ty	so be completed. E pe Diagrams (at t	Inter heights to the he end of Section H
H1. Provide the he	eight of the top of the floor (as	s indicated in Found	dation Type Diagrams) above	the Lowest Adjace	ent Grade (LAG):
floor (include	ng Diagrams 1A, 1B, 3, and above-grade floors only for bu wispaces or enclosure floors)	uildings with		meters	above the LAG
	ng Diagrams 2A, 2B, 4, and e., the floor above basement, or) is:			meters	above the LAG
	ery and Equipment servicing to own in the Foundation Type D No				
SECTIO	ON I - PROPERTY OWNE	R (OR OWNER'S	S AUTHORIZED REPRES	ENTATIVE) CER	RTIFICATION
A, B, and H are co indicate in Item G2	er or owner's authorized repre verect to the best of my knowle 2.b and sign Section G. vitachments are provided (incl	edge. Note: If the lo	cal floodplain management o	fficial completed S	ection H, they should
_	Owner's Authorized Represe				
	Owner's Authorized Represe				
			01-1-	ZIP Code	e:
			-		
Signature:			Date:		
Telephone:	Ext.:	Email:			
Comments:					
				EIVED	
			TOWN OF	1 3 2023 ONGBOAT KE oning & Building	Υ

## **IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19 BUILDING PHOTOGRAPHS**

See Instructions for Item A6.

ing Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:			
State: _	FL	ZIP Code: <u>34228</u>	Policy Number:

Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Planning, Zoning & Building

Photo One

Photo One Caption: FRONT VIEW

Clear Photo One



Photo Two

Photo Two Caption: REAR VIEW

Clear Photo Two

### **IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19 BUILDING PHOTOGRAPHS**

Continuation Page

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: **501 HARBOR POINT ROAD** 

City: TOWN OF LONGBOAT KEY

State:

FL

ZIP Code: 34228

FOR INSURANCE COMPANY USE

Policy Number: \_

Company NAIC Number:

Insert the third and fourth photographs below. Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo Three

Photo Three Caption: SIDE VIEW-WEST SIDE

Clear Photo Three



Photo Four

Photo Four Caption: TYPICAL FLOW-THRU VENTS

Clear Photo Four



Most Widely Accepted and Trusted

## **ICC-ES Evaluation Report**

**ESR-2074** 

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

Reissued 02/2023 This report is subject to renewal 02/2025.

DIVISION: 08 00 00—OPENINGS SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS



REPORT HOLDER:

**SMART VENT PRODUCTS, INC.** 


**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"

















 I-Codes provide recognition in all 50 states

Specialty code recognition

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

# ICC-ES Evaluation Report ESR-2074

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 EVALUATION SCOPE

#### Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code<sup>®</sup> (IRC)
- 2021 and 2018 International Energy Conservation Code<sup>®</sup> (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)<sup>†</sup>

†The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

#### Properties evaluated:

- Physical operation
- Water flow

#### **2.0 USES**

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

#### 3.0 DESCRIPTION

#### 3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing

Reissued February 2023

This report is subject to renewal February 2025.

the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

#### 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

#### 3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs described in this report do not offer natural ventilation.


#### 3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

#### 4.0 DESIGN AND INSTALLATION

#### 4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:





- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

## 4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

## 5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the

- manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

## **6.0 EVIDENCE SUBMITTED**

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).
- **6.2** Test report on air infiltration in accordance with ASTM E283.

## 7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit described in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC.
19 MANTUA ROAD
MOUNT ROYAL, NEW JERSEY 08061
(877) 441-8368
www.smartvent.com
info@smartvent.com

## TABLE 1—MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)	
FloodVENT®	1540-520	$15^3/_4$ " $\times 7^3/_4$ "	200	
SmartVENT®	1540-510	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200	
FloodVENT® Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200	
SmartVENT® Overhead Door	1540-514	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200	
Wood Wall FloodVENT®	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200	
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200	
SmartVENT® Stacker	1540-511	16" X 16"	400	
FloodVent® Stacker	1540-521	16" X 16"	400	

For SI: 1 inch = 25.4 mm; 1 square foot = m<sup>2</sup>

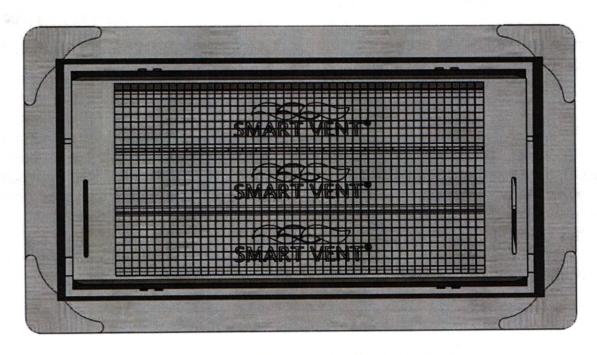


FIGURE 1—SMART VENT: MODEL 1540-510

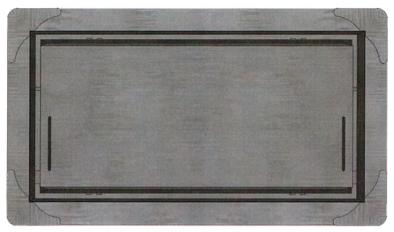


FIGURE 2—SMART VENT MODEL 1540-520



FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

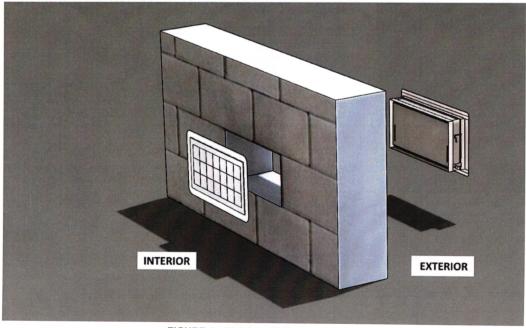


FIGURE 4—FLOOD VENT SEALING KIT