## U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

# ELEVATION CERTIFICATE Important: Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY IN	FORMATION		FOR INSU	RANCE COMPANY USE
A1. Building Owner's Name NEAL SIGNATURE HOMES			Policy Num	ber:
<ul><li>A2. Building Street Address (including Apt., Unit, Suite, a Box No.</li><li>560 WEDGE LANE</li></ul>	and/or Bldg. No.) o	P.O. Route and	Company N	NAIC Number:
City LONGBOAT KEY SARASOTA	State Florida		ZIP Code 34228	
A3. Property Description (Lot and Block Numbers, Tax P. LOT 5, BLOCK D, UNIT 5, SECTION 2 COUNTRY CLU		gal Description, etc	:.)	
A4. Building Use (e.g., Residential, Non-Residential, Add	dition, Accessory, e	etc.) RESIDENT	ΓIAL	
A5. Latitude/Longitude: Lat. 27°20'58.2" N Lor	ng. 82°36'11.3" W	Horizontal	Datum: NAD	1927 × NAD 1983
A6. Attach at least 2 photographs of the building if the Ce	ertificate is being u	sed to obtain flood	insurance.	
A7. Building Diagram Number1B				
A8. For a building with a crawlspace or enclosure(s):				
a) Square footage of crawlspace or enclosure(s)		0.00 sq ft		
b) Number of permanent flood openings in the crawls	space or enclosure	(s) within 1.0 foot	above adjacent gra	ade 0
c) Total net area of flood openings in A8.b	0.00 sq in			
d) Engineered flood openings? ☐ Yes ☒ No				
A9. For a building with an attached garage:				
a) Square footage of attached garage	420.00 sq ft			
b) Number of permanent flood openings in the attach	ned garage within 1	.0 foot above adja	cent grade 4	
c) Total net area of flood openings in A9.b	204.00 sq	in		
d) Engineered flood openings? X Yes No				
SECTION B - FLOOD INS			DRMATION	
B1. NFIP Community Name & Community Number 125126 LONG BOAT KEY	B2. County I SARASOTA			B3. State Florida
B4. Map/Panel B5. Suffix B6. FIRM Index B7 Date	7. FIRM Panel Effective/	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, use	levation(s) e Base Flood Depth)
12115C0126 F 11-04-2016 11-	Revised Date -04-2016	AE	10'	
B10. Indicate the source of the Base Flood Elevation (BF	E) data or base flo	od depth entered i	n Item B9:	
☐ FIS Profile ☒ FIRM ☐ Community Determine	ed Other/Sour	ce:		
B11. Indicate elevation datum used for BFE in Item B9: [	NGVD 1929	× NAVD 1988 [	Other/Source:	
B12. Is the building located in a Coastal Barrier Resource	es System (CBRS)	area or Otherwise	Protected Area (C	Yes 🖂 No
Designation Date: CBF	RS OPA		SEP 10	2018
		TO		BOAT KEY

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding	information from Se	ction A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or 560 WEDGE LANE	Bldg. No.) or P.O. Ro	ute and Box No.	Policy Number:
City Stat LONGBOAT KEY SARASOTA Flor		Code 228	Company NAIC Number
SECTION C - BUILDING ELE	VATION INFORMA	TION (SURVEY R	EQUIRED)
C1. Building elevations are based on: Constructio  *A new Elevation Certificate will be required when co	enstruction of the build		
Complete Items C2.a–h below according to the build Benchmark Utilized: COUNTY. BM  Indicate elevation datum used for the elevations in ite  NGVD 1929  NAVD 1988  Other/S	Vertical Datum ems a) through h) belo	: NAVD 88 DATUM	o Rico only, enter meters.
Datum used for building elevations must be the same	e as that used for the	BFE.	Check the measurement used.
a) Top of bottom floor (including basement, crawlspa	ace, or enclosure floor	·)	11.05 X feet meters
b) Top of the next higher floor			N/A feet meters
c) Bottom of the lowest horizontal structural membe	r (V Zones only)		N/A feet meters
d) Attached garage (top of slab)			6.82 × feet meters
e) Lowest elevation of machinery or equipment serv     (Describe type of equipment and location in Com	ments)		11.01 × feet meters
f) Lowest adjacent (finished) grade next to building	(LAG)		6.10 X feet meters
g) Highest adjacent (finished) grade next to building	(HAG)	***************************************	7.40 X feet meters
h) Lowest adjacent grade at lowest elevation of decleration structural support	k or stairs, including		5.00 🗵 feet 🗌 meters
SECTION D – SURVEYOR,	ENGINEER, OR AR	CHITECT CERTIFI	CATION
This certification is to be signed and sealed by a land sur I certify that the information on this Certificate represents statement may be punishable by fine or imprisonment und	my best efforts to inte der 18 U.S. Code, Sed	rpret the data availa ction 1001.	law to certify elevation information. ble. I understand that any false
Were latitude and longitude in Section A provided by a lic	ensed land surveyor?	≚Yes ∐No	○ Check here if attachments.
Certifier's Name	License Number		Digitally signed by Kyle
KYLE E CROSS	7176		Cross
Title PLS			DN: cn=Kyle Cross,
Company Name CROSS SURVEYING			o=Cross Surveying, LLC, ou,
Address 5265 OFFICE PARK BLVD SUITE 101			email=kyle@crosssurveyin g.com, c=US
City BRADENTON	State Florida	ZIP Code 34203	Date: 2018.09.07 15:59:31 -04'00'
Dig http://doi.org/10.1009/10.0009/10.	Date 09-06-2018	Telephone (941) 748-8340	Ext.
Copy all pages of this Elevation Certificate and all attachmer	its for (1) community of	fficial, (2) insurance a	agent/company, and (3) building owner.
Comments (including type of equipment and location, per AC IS MOUNTED ON THE RIGHT SIDE OF THE HOUSE SMART VENT USED WALL MODEL #1540-520 = 2 X 20 SMART VENT USED GARAGE MODEL #1540-524 = 2 X REVISED A9c 09-06-2018 BS	ELEV =11.01 0 SQ INCHES EACH	CH= 400 SQ. 8-27-	and the second s
			ECEIVED
			SEP 1.0 2018

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the correspon	ding information from Se	ction A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, ar 560 WEDGE LANE	nd/or Bldg. No.) or P.O. Ro	ute and Box No.	Policy Number:
City LONGBOAT KEY SARASOTA	State ZIP Florida 342	Code 228	Company NAIC Number
SECTION E – BUILDING E FOR ZON	LEVATION INFORMATION IE AO AND ZONE A (WI		REQUIRED)
For Zones AO and A (without BFE), complete Items E complete Sections A, B,and C. For Items E1–E4, use enter meters.  E1. Provide elevation information for the following and the highest adjacent grade (HAG) and the lowest	natural grade, if available.  d check the appropriate bo	Check the measure	ment used. In Puerto Rico only,
<ul> <li>Top of bottom floor (including basement, crawlspace, or enclosure) is</li> </ul>		☐ feet ☐ meter	s above or below the HAG.
<ul> <li>Top of bottom floor (including basement, crawlspace, or enclosure) is</li> </ul>		feet meter	s above or below the LAG.
E2. For Building Diagrams 6–9 with permanent flood the next higher floor (elevation C2.b in the diagrams) of the building is	openings provided in Secti	feet meter	s above or below the HAG.
E3. Attached garage (top of slab) is  E4. Top of platform of machinery and/or equipment	-	feet meter	s above or below the HAG.
servicing the building is  E5. Zone A0 only: If no flood depth number is available floodplain management ordinance? Yes			
SECTION F - PROPERTY OW	NER (OR OWNER'S REP	RESENTATIVE) CE	RTIFICATION
The property owner or owner's authorized representat community-issued BFE) or Zone AO must sign here.	ive who completes Section The statements in Sections	ns A, B, and E for Zo A, B, and E are con	ne A (without a FEMA-issued or rect to the best of my knowledge.
Property Owner or Owner's Authorized Representative	e's Name		
Address	City	Sta	ate ZIP Code
Signature	Date	Te	lephone
Comments			
		R	ECEIVED
			SEP 1 0 2018
		TOWN	OF-LONGBOAT, KEY

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corr	esponding information fron	Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, S 560 WEDGE LANE	uite, and/or Bldg. No.) or P.O	. Route and Box No.	Policy Number:
City LONGBOAT KEY SARASOTA	State Florida	ZIP Code 34228	Company NAIC Number
SECTION	ON G - COMMUNITY INFOR	MATION (OPTIONAL)	
The local official who is authorized by law or or Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, er	Certificate. Complete the ap	nmunity's floodplain mai plicable item(s) and sign	nagement ordinance can complete below. Check the measurement
G1. The information in Section C was tak engineer, or architect who is authoriz data in the Comments area below.)			
G2. A community official completed Sect or Zone AO.	ion E for a building located in	Zone A (without a FEMA	A-issued or community-issued BFE)
G3. The following information (Items G4-	-G10) is provided for commur	ity floodplain manageme	ent purposes.
G4. Permit Number	G5. Date Permit Issued		Date Certificate of compliance/Occupancy Issued
G7. This permit has been issued for:	New Construction  Subs	tantial Improvement	
G8. Elevation of as-built lowest floor (including of the building:	g basement)	feet	meters Datum
G9. BFE or (in Zone AO) depth of flooding at	the building site:	feet	meters Datum
G10. Community's design flood elevation:		feet	meters Datum
Local Official's Name	Title		
Community Name	Tele	phone	
Signature	Date		
Comments (including type of equipment and loc	cation, per C2(e), if applicable	)	
			8
			,
			RECEIVED
			SEP 1 0 2018
		TOV	IN OF LONGBOAT KEY

#### **BUILDING PHOTOGRAPHS**

**ELEVATION CERTIFICATE** 

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A.		FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 560 WEDGE LANE			Policy Number:
City	State	ZIP Code	Company NAIC Number
LONGBOAT KEY SARASOTA	Florida	34228	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

FRONT OF THE HOUSE 08-27-2018 Photo One Caption

Clear Photo One



Photo Two Caption REAR OF THE HOUSE 08-27-2018

Clear Photo Two

#### **BUILDING PHOTOGRAPHS**

**ELEVATION CERTIFICATE** 

Continuation Page

OMB No. 1660-0008

Expiration Date: November 30, 2018

MPORTANT: In these spaces, copy the corresponding information from Section A.		FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Uni 560 WEDGE LANE	t, Suite, and/or Bldg. No.)	or P.O. Route and Box No.	Policy Number:
City	State	ZIP Code	Company NAIC Number
LONGBOAT KEY SARASOTA	Florida	34228	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption AC MOUNTED ON THE RIGHT SIDE OF HOUSE 08-27-2018


Clear Photo Three





Photo Four

Photo Four Caption VIEW OF FLOOD VENT USED 08-27-2018

CEP 10 20 Glear Photo Four

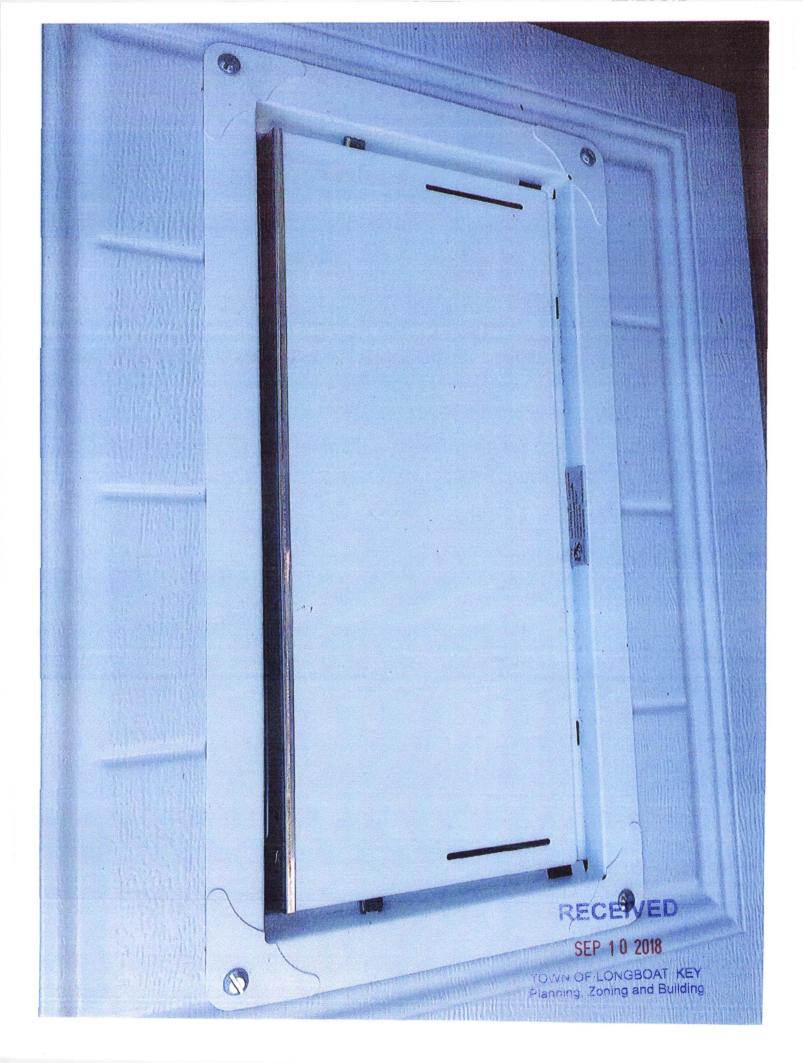

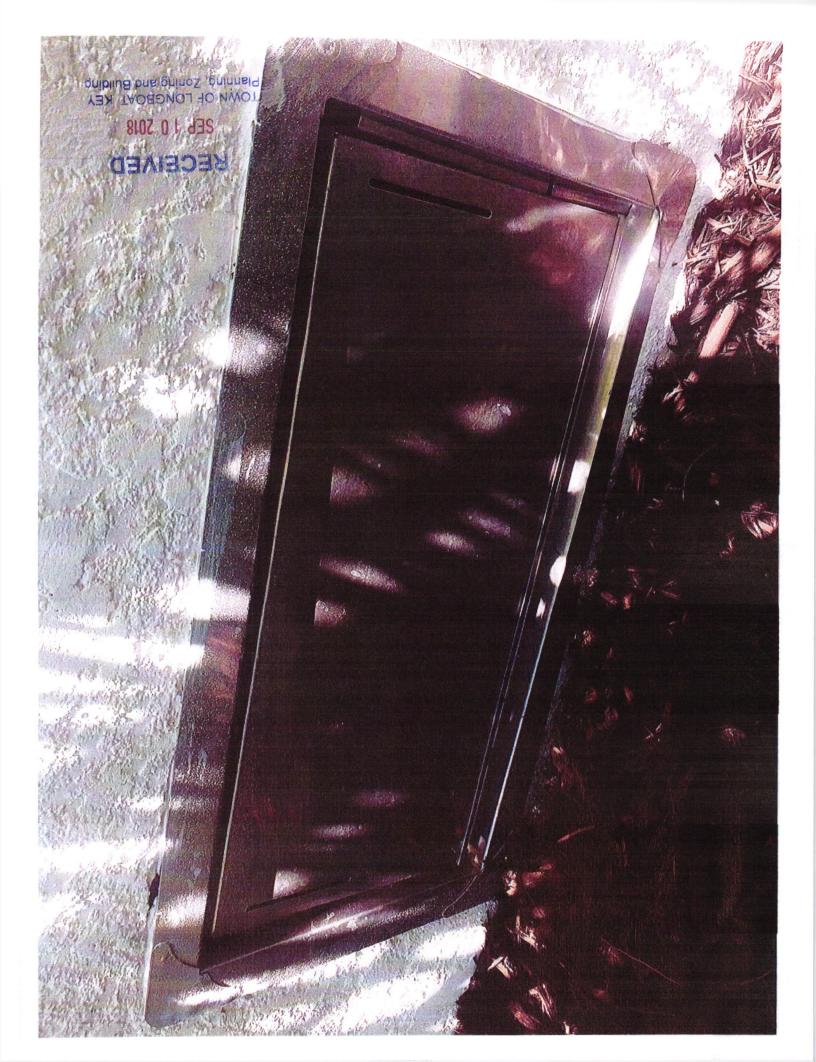

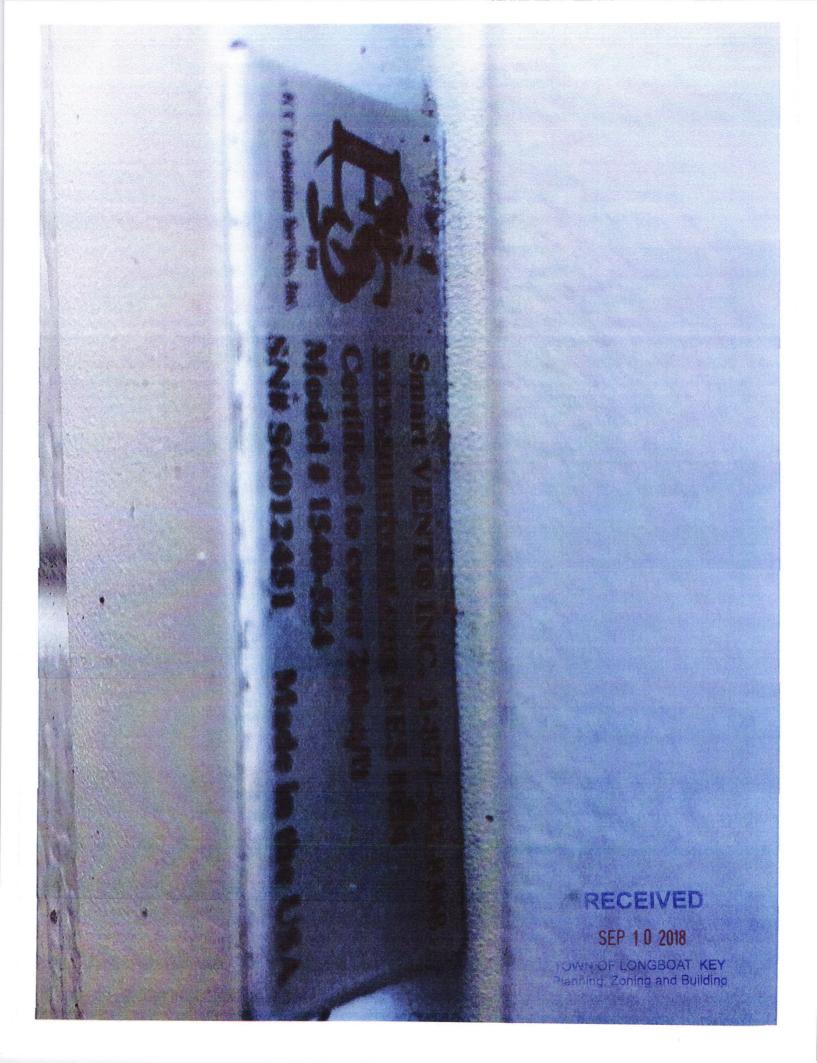

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2017 This report is subject to renewal 02/2019.

**DIVISION: 08 00 00—OPENINGS** 

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

#### REPORT HOLDER:

## SMARTVENT PRODUCTS, INC.

430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514



Look for the trusted marks of Conformity!

"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"







recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the country of

SEP 1 0 2018



#### ESR-2074

Reissued February 2017 Revised November 2017

This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

#### REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

#### 1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2013 Abu Dhabi International Building Code (ADIBC)<sup>†</sup>

<sup>†</sup>The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

#### Properties evaluated:

- Physical operation
- Water flow

#### 2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

#### 3.0 DESCRIPTION

#### 3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

#### 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

#### 3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with 1/4-inch-by-1/4-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm<sup>2</sup>) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

#### 4.0 DESIGN AND INSTALLATION

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m2) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be



installed with a minimum of one FV for every 400 square feet (37.2 m<sup>2</sup>) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

#### 5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent<sup>®</sup> FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent<sup>®</sup> FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

#### 6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015.

#### 7.0 IDENTIFICATION

The Smart VENT® models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT <sup>®</sup>	1540-520	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT®	1540-510	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
FloodVENT® Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup> Overhead Door	1540-514	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT <sup>®</sup>	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup> Stacker	1540-511	16" X 16"	400
FloodVent <sup>®</sup> Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m2

RECEIVED

SEP 1 0 2018

TOWN OF LONGBOAT KEY Planning, Zoning and Building



FIGURE 1-SMART VENT: MODEL 1540-510

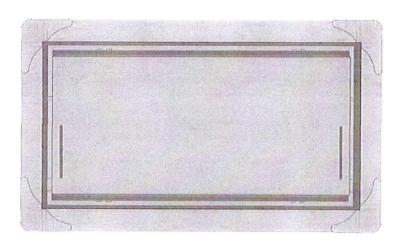


FIGURE 2—SMART VENT MODEL 1540-520

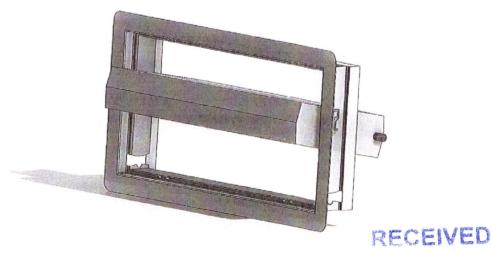


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

SEP 1 0 2018



## ESR-2074 CBC and CRC Supplement

Issued February 2017 Revised November 2017

This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

#### REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

#### Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

#### 2.0 CONCLUSIONS

#### 2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 International Building Code® (IBC) provisions noted in the master report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

The products recognized in this supplement have not been evaluated under CBC Chapter 7A for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.


#### 2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 International Residential Code® (IRC) provisions noted in the master report.

The products recognized in this supplement have not been evaluated under 2016 CRC Chapter R337, for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

The products recognized in this supplement have not been evaluated for compliance with the International Wildland-Urban Interface Code®

This supplement expires concurrently with the master report, reissued February 2017 and revised November 2017.



Planning, Zoning and Building



## **ESR-2074 FBC Supplement**

Reissued February 2017 Revised November 2017 This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master report ESR-2074, have also been evaluated for compliance with the codes noted below.

#### Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

#### 2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the Florida Building Code-Building and the FRC, provided the design and installation are in accordance with the 2015 International Building Code® provisions noted in the master report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the master report, reissued February 2017 and revised November 2017.

