# U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency

National Flood Insurance Program

OMB No. 1660-0008

Expiration Date: November 30, 2022

### **ELEVATION CERTIFICATE**

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION	FOR INSURA	NCE COMPANY USE		
A1. Building Owner's Name Randall B. & Charlotta Z. Langley	Policy Numbe	r:		
<ul> <li>A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.</li> <li>6680 Gulf of Mexico Drive</li> </ul>	Company NAI	IC Number:		
City State Town of Longboat Key Florida	ZIP Code 34228			
A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Legal Description, etc. Lot 3 & 4, Rauch Subdivision PID# 7827400359	)	8/ -		
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.) Residential		G PED		
A5. Latitude/Longitude: Lat. 27°25'52.7" Long. 82°40'46.1" Horizontal	Datum: NAD 192	27 X NAD 1983 PLA		
A6. Attach at least 2 photographs of the building if the Certificate is being used to obtain flood	insurance.	Recor		
A7. Building Diagram Number6_		70		
A8. For a building with a crawlspace or enclosure(s):				
a) Square footage of crawlspace or enclosure(s) 3434.00 sq ft				
b) Number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot a	above adjacent grade	e <u>18</u>		
c) Total net area of flood openings in A8.b 3600.00 sq in	RECEIV	ED		
d) Engineered flood openings? X Yes No				
A9. For a building with an attached garage:	APR 07 202	21		
TOWN OF LONGBOAT KEY				
a) Square footage of attached garageN/A sq ftPlanning, Zoning & Building b) Number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade N/A				
c) Total net area of flood openings in A9.b N/A sq in	<u></u>			
d) Engineered flood openings?				
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMATION				
B1. NFIP Community Name & Community Number B2. County Name	1	33. State		
Town of Longboat Key 125126 Manatee	F	Florida		
B4. Map/Panel B5. Suffix B6. FIRM Index Date B7. FIRM Panel Effective/ Revised Date B8. Flood Zone(s)	B9. Base Flood Elev (Zone AO, use E	vation(s) Base Flood Depth)		
12081C0291 E 03-17-2014 03-17-2014 AE	10			
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:				
☐ FIS Profile ☒ FIRM ☐ Community Determined ☐ Other/Source:				
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 X NAVD 1988 Other/Source:				
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)?   Yes   No				
Designation Date: CBRS OPA				

### **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from	om Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P. 6680 Gulf of Mexico Drive	O. Route and Box No.	Policy Number:
City State Town of Longboat Key Florida	ZIP Code 34228	Company NAIC Number
SECTION C - BUILDING ELEVATION INFO	RMATION (SURVEY R	EQUIRED)
C1. Building elevations are based on:   Construction Drawings*	Building Under Constru	ction* X Finished Construction
*A new Elevation Certificate will be required when construction of the	e building is complete.	AE ADIA4 A20 ADIAH ADIAO
SECTION C – BUILDING ELEVATION INFO  C1. Building elevations are based on:   Construction Drawings*  *A new Elevation Certificate will be required when construction of the C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V Complete Items C2.a–h below according to the building diagram spe Benchmark Utilized:   DNR 13 #B4-B-10   Vertical Indicate elevation datum used for the elevations in items a) through  NGVD 1929  NAVD 1988  Other/Source:  Datum used for building elevations must be the same as that used for	ecified in Item A7. In Puert Datum: NGVD	o Rico only, enter meters
Indicate elevation datum used for the elevations in items a) through	h) below.	CODY FILET
☐ NGVD 1929  ▼ NAVD 1988 ☐ Other/Source:		Of Age
Datum used for building elevations must be the same as that used for	or the BFE.	Check the measurement used.
a) Top of bottom floor (including basement, crawlspace, or enclosur		5.6 🗷 feet 🗌 meters
b) Top of the next higher floor		17.0 🗷 feet 🗌 meters
c) Bottom of the lowest horizontal structural member (V Zones only)		N/A  feet  meters
d) Attached garage (top of slab)		N/A feet meters
e) Lowest elevation of machinery or equipment servicing the buildin (Describe type of equipment and location in Comments)	g 	11.1 🗷 feet 🗌 meters
f) Lowest adjacent (finished) grade next to building (LAG)		5.1 X feet  meters
g) Highest adjacent (finished) grade next to building (HAG)		5.3 X feet meters
<ul> <li>h) Lowest adjacent grade at lowest elevation of deck or stairs, inclu structural support</li> </ul>	ding	5.0 X feet meters
SECTION D - SURVEYOR, ENGINEER, O	R ARCHITECT CERTIF	CATION
This certification is to be signed and sealed by a land surveyor, engineer I certify that the information on this Certificate represents my best efforts statement may be punishable by fine or imprisonment under 18 U.S. Coo	to interpret the data availa	law to certify elevation information. ble. I understand that any false
Were latitude and longitude in Section A provided by a licensed land surv	veyor? ⊠Yes □No	Check here if attachments.
Certifier's Name License Numb	er	" WEDER
Lawrence R. Weber PSM 3868		The second second
Title Professional Surveyor & Mapper		= = = = = = = = = = = = = = = = = = = =
Company Name		OR S.
Weber Engineering & Surveying, Inc.		lean search
Address 4596 Ashton Road		Hex
City State Florida	ZIP Code 34233	OFESSION A.
Signature Date 442021	Telephone (941) 921-3914	Ext.
Copy all pages of this Elevation Certificate and all attachments for (1) comm	unity official, (2) insurance a	agent/company, and (3) building owner.
Comments (including type of equipment and location, per C2(e), if applica A9.d - SMART VENT MODEL #1540-520 RATED FOR 200 SF COVERA C2.e - A/C LEFT SID AT COOLINE LEVEL		
C2.h - REAR STAIR AT GROUND LEVEL A5 - LAT/LONG FROM FEMA INTERACTIVE MAP A.9 - GARAGE IS LOCATED UNDER STRUCTURE, AREA IS INCLUDE	D IN ITEM A.8	0

### **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding			FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/6680 Gulf of Mexico Drive	or Bldg. No.) or P.O. Rou	ite and Box No.	Policy Number:
*	tate ZIP lorida 3422	Code 28	Company NAIC Number
SECTION E – BUILDING ELE FOR ZONE	EVATION INFORMATIO AO AND ZONE A (WIT		REQUIRED)
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters.			
<ul><li>E1. Provide elevation information for the following and of the highest adjacent grade (HAG) and the lowest ad a) Top of bottom floor (including basement,</li></ul>		es to show whether	r the elevation is above or below
crawlspace, or enclosure) is b) Top of bottom floor (including basement,		feet meter	s above or below the HAG.
crawlspace, or enclosure) is		feet meter	
E2. For Building Diagrams 6–9 with permanent flood op the next higher floor (elevation C2.b in the diagrams) of the building is	enings provided in Section	on A Items 8 and/or	
E3. Attached garage (top of slab) is		☐ feet ☐ meter	
E4. Top of platform of machinery and/or equipment servicing the building is		☐ feet ☐ meters	s above or below the HAG.
E5. Zone AO only: If no flood depth number is available floodplain management ordinance? Yes			cordance with the community's certify this information in Section G.
SECTION F - PROPERTY OWN	ER (OR OWNER'S REP	RESENTATIVE) CE	RTIFICATION
The property owner or owner's authorized representative community-issued BFE) or Zone AO must sign here. The	who completes Sections e statements in Sections	s A, B, and E for Zo A, B, and E are con	ne A (without a FEMA-issued or rect to the best of my knowledge.
Property Owner or Owner's Authorized Representative's	Name		
Address	City	Sta	ate ZIP Code
Signature	Date	Tel	lephone
Comments			
			BLDG PERMIT PLANS FILE Copy of Record
			Check here if attachments.

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corre	sponding information fror	m Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, St 6680 Gulf of Mexico Drive	uite, and/or Bldg. No.) or P.C	). Route and Box No.	Policy Number:
City Town of Longboat Key	State Florida	ZIP Code 34228	Company NAIC Number
SECTIO	ON G - COMMUNITY INFOR	RMATION (OPTIONAL)	
The local official who is authorized by law or or Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, en	Certificate. Complete the ap		
G1. The information in Section C was take engineer, or architect who is authorized tata in the Comments area below.)			
G2. A community official completed Section Zone AO.	on E for a building located in	Zone A (without a FEMA	A-issued or community-issued BFE)
The following information (Items G4–G10) is provided for community floodplain management purposes.			
G4. Permit Number	G5. Date Permit Issued		Date Certificate of Compliance/Occupancy Issued
G7. This permit has been issued for:	New Construction Subs	stantial Improvement	
G8. Elevation of as-built lowest floor (including of the building:	j basement)	feet	meters Datum
G9. BFE or (in Zone AO) depth of flooding at t	he building site:	feet	meters Datum
G10. Community's design flood elevation:	17 <del></del>	feet	meters Datum
Local Official's Name	Title	•	
Community Name	Tele	ephone	
Signature	Date	е	
Comments (including type of equipment and loc	ation, per C2(e), if applicable	e)	BLDG PERMIT PLANS FILE Copy of Record
			opy of Record
			Check here if attachments.

#### **BUILDING PHOTOGRAPHS**

#### **ELEVATION CERTIFICATE**

See Instructions for Item A6.

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.			FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.			Policy Number:
6680 Gulf of Mexico Drive			
City	State	ZIP Code	Company NAIC Number
Town of Longboat Key	Florida	34228	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

Photo One Caption FRONT 3-18-2021 Clear Photo One



Photo Two

Photo Two Caption RIGHT 3-18-2021

Clear Photo Two

#### **BUILDING PHOTOGRAPHS**

#### **ELEVATION CERTIFICATE**

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.

6680 Gulf of Mexico Drive

City State ZIP Code
Town of Longboat Key Florida 34228

FOR INSURANCE COMPANY USE

FOR INSURANCE COMPANY USE

Company NAIC Number:

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption REAR 3-18-2021

Clear Photo Three

CODY OF RECORD



Photo Four

Photo Four Caption LEFT 3-18-2021

Clear Photo Four

#### **BUILDING PHOTOGRAPHS**

#### **ELEVATION CERTIFICATE**

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.			FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 6680 Gulf of Mexico Drive			Policy Number:
City	State	ZIP Code	Company NAIC Number
Town of Longboat Key	Florida	34228	1

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



BLDG PERMIT PLANS

Copy of Record

Photo One

Photo One Caption VENT

Clear Photo One



Photo Two

Photo Two Caption VENT MODEL

Clear Photo Two



### **ICC-ES Evaluation Report**

#### ESR-2074

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511: #1540-570: #1540-574: #1540-524: #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 EVALUATION SCOPE

#### Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)<sup>†</sup>

<sup>†</sup>The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC

#### Properties evaluated:

- Physical operation
- Water flow

#### 2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

#### 3.0 DESCRIPTION

#### 3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent Automatic Foundation Flood Vents are available in warious models and sizes as described in Table 1. The #1540-511 and FloodVENT Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

#### 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

#### 3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with  $^{1}/_{4}$ -inch-by- $^{1}/_{4}$ -inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm<sup>2</sup>) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm<sup>2</sup>) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

#### 3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 - 2-inch-by-2inch (51 mm x 51 mm) squares cut in it. See Figure 4.

### 4.0 DESIGN AND INSTALLATION

#### 4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square



feet (18.6 m2) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m<sup>2</sup>) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

#### 4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT  $^{\$}$  Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 I/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

### 5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.

5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

#### 6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- 6.2 Test report on air infiltration in accordance with ASTM

#### 7.0 IDENTIFICATION

- E283.

  DENTIFICATION

  The Smart VENT® models and the Flood Vent Sealing
  Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation

  Products, Inc.), the model number, and the evaluation

  Figure (ESR-2074). 7.1 The Smart VENT® models and the Flood Vent Sealing
- 7.2 The report holder's contact information is the

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT®	1540-510	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
FloodVENT® Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Overhead Door	1540-514	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT®	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m2



FIGURE 1—SMART VENT: MODEL 1540-510


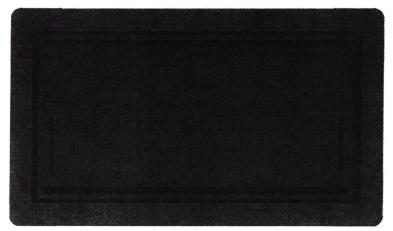


FIGURE 2—SMART VENT MODEL 1540-520

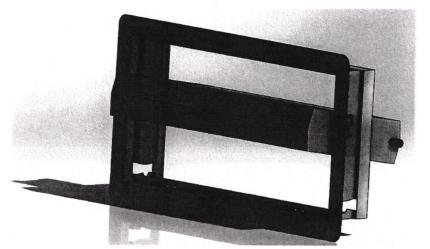

Copy of Record

FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

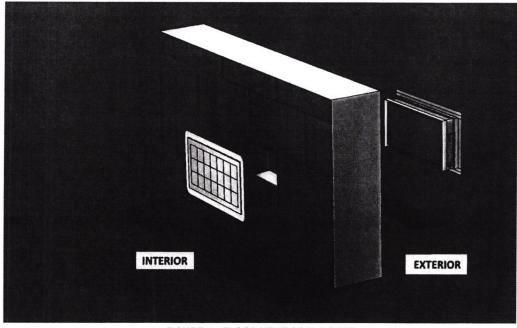


FIGURE 4—FLOOD VENT SEALING KIT



### ICC-ES Evaluation Report

### **ESR-2074 CBC and CRC Supplement**

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 REPORT PURPOSE AND SCOPE

O REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents recognized in ICC-ES master evaluation report ESR-2074, have also been evaluated for compliance with codes noted.

#### Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

#### 2.0 CONCLUSIONS

#### 2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 International Building Code® (IBC) provisions noted in the master report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

The products recognized in this supplement have not been evaluated under CBC Chapter 7A for use in the exterior design and construction of new buildings located in any Fire Hazard Seventy Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

#### 2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 International Residential Code® (IRC) provisions noted in the master report.

The products recognized in this supplement have not been evaluated under 2016 CRC Chapter R337, for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

The products recognized in this supplement have not been evaluated for compliance with the International Wildland-Urban Interface Code®

This supplement expires concurrently with the master report, reissued February 2019.





### **ICC-ES Evaluation Report**

### **ESR-2074 FBC Supplement**

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

CODY OF PROOFE SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master report ESR-2074, have also been evaluated for compliance with the codes noted below.

#### Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

#### 2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the *Florida Building Code—Building* and the FRC, provided the design and installation are in accordance with the 2015 *International Building Code®* provisions noted in the master report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the master report, reissued February 2019.

