


**INDEX OF DRAWINGS**

- A-1 WINDOW REPLACEMENT BUILDING PLAN / NOTES / PARTIAL DEMOLITION PLAN
- A-2 DOOR SCHEDULE / WINDOW SCHEDULE / NOTES / WINDOW ELEVATIONS
- A-3 WINDOW ELEVATIONS
- A-4 ROOF PLAN
- A-5 GENERATOR ENCLOSURE PARTIAL FLOOR AND FOUNDATION PLAN / EXTERIOR ELEVATIONS / NOTES
- A-6 GENERATOR ENCLOSURE WALL SECTIONS

**Randall Paul Sample, Architect**  
AR0011544

Digitally signed by  
Randall Paul Sample,  
Architect AR0011544  
Date: 2024.09.06  
14:18:50 -04'00'

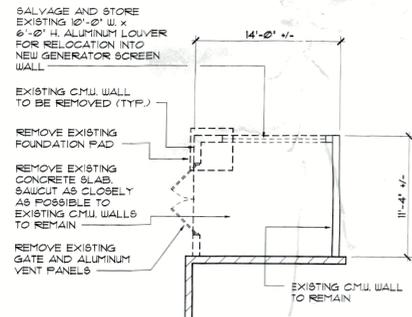


**PARTIAL DEMOLITION PLAN**  
SCALE: 1/8" = 1'-0"

**GENERAL DEMOLITION NOTES**

1. CONTRACTOR SHALL INSPECT AND VERIFY THE SCOPE OF WORK. ANY ADDITIONAL WORK NOT SPECIFICALLY NOTED ON THE DRAWINGS BUT BECOMES APPARENT UPON CAREFUL FIELD INSPECTION SHALL BE CONSIDERED AS PART OF THIS CONTRACT.
2. PROVIDE SMOOTH, UNDETECTABLE TRANSITION FROM EXISTING TO NEW CONSTRUCTION.
3. OWNER HAS FIRST SALVAGE RIGHTS TO ANY ELEMENT OF EXISTING CONSTRUCTION TO BE REMOVED DURING DEMOLITION OPERATIONS.
4. PATCH AND REPAIR ALL CONSTRUCTION TO REMAIN WHERE AFFECTED BY DEMOLITION OPERATIONS.
5. PROTECT CONSTRUCTION TO REMAIN FROM WEATHER INTRUSION, VANDALISM, AND ALL OTHER RISKS CREATED BY DEMOLITION OPERATIONS.
6. FIELD VERIFY ALL DIMENSIONS ASSOCIATED WITH EXISTING CONSTRUCTION.
7. ALL EXISTING STRUCTURAL SUPPORT COMPONENTS SHALL REMAIN INTACT EXCEPT AS OTHERWISE INDICATED.
8. PATCH ANY EXISTING CONSTRUCTION AS REQUIRED WHICH IS DAMAGED DUE TO THE INSTALLATION OF NEW FIXTURES, ELECTRICAL DEVICES, EQUIPMENT, OR ANY OTHER NEW COMPONENT OR DAMAGED DUE TO ADJACENT DEMOLITION WORK.
9. PROTECT ALL EXISTING FINISHES TO REMAIN FROM DAMAGE FOR DURATION OF NEW CONSTRUCTION.
10. PATCH AND REPAIR EXISTING CONSTRUCTION WHERE ELECTRICAL AND MECHANICAL DEVICES ARE TO BE REMOVED OR RELOCATED. MATCH EXISTING.

**WALL LEGEND**

- EXISTING CMU EXTERIOR WALL (8" NOM. OR 12" NOM.)
- NEW 8" NOM. CMU SCREEN WALL AROUND NEW GENERATOR (SEE SHEET A-2 FOR FURTHER INFORMATION)

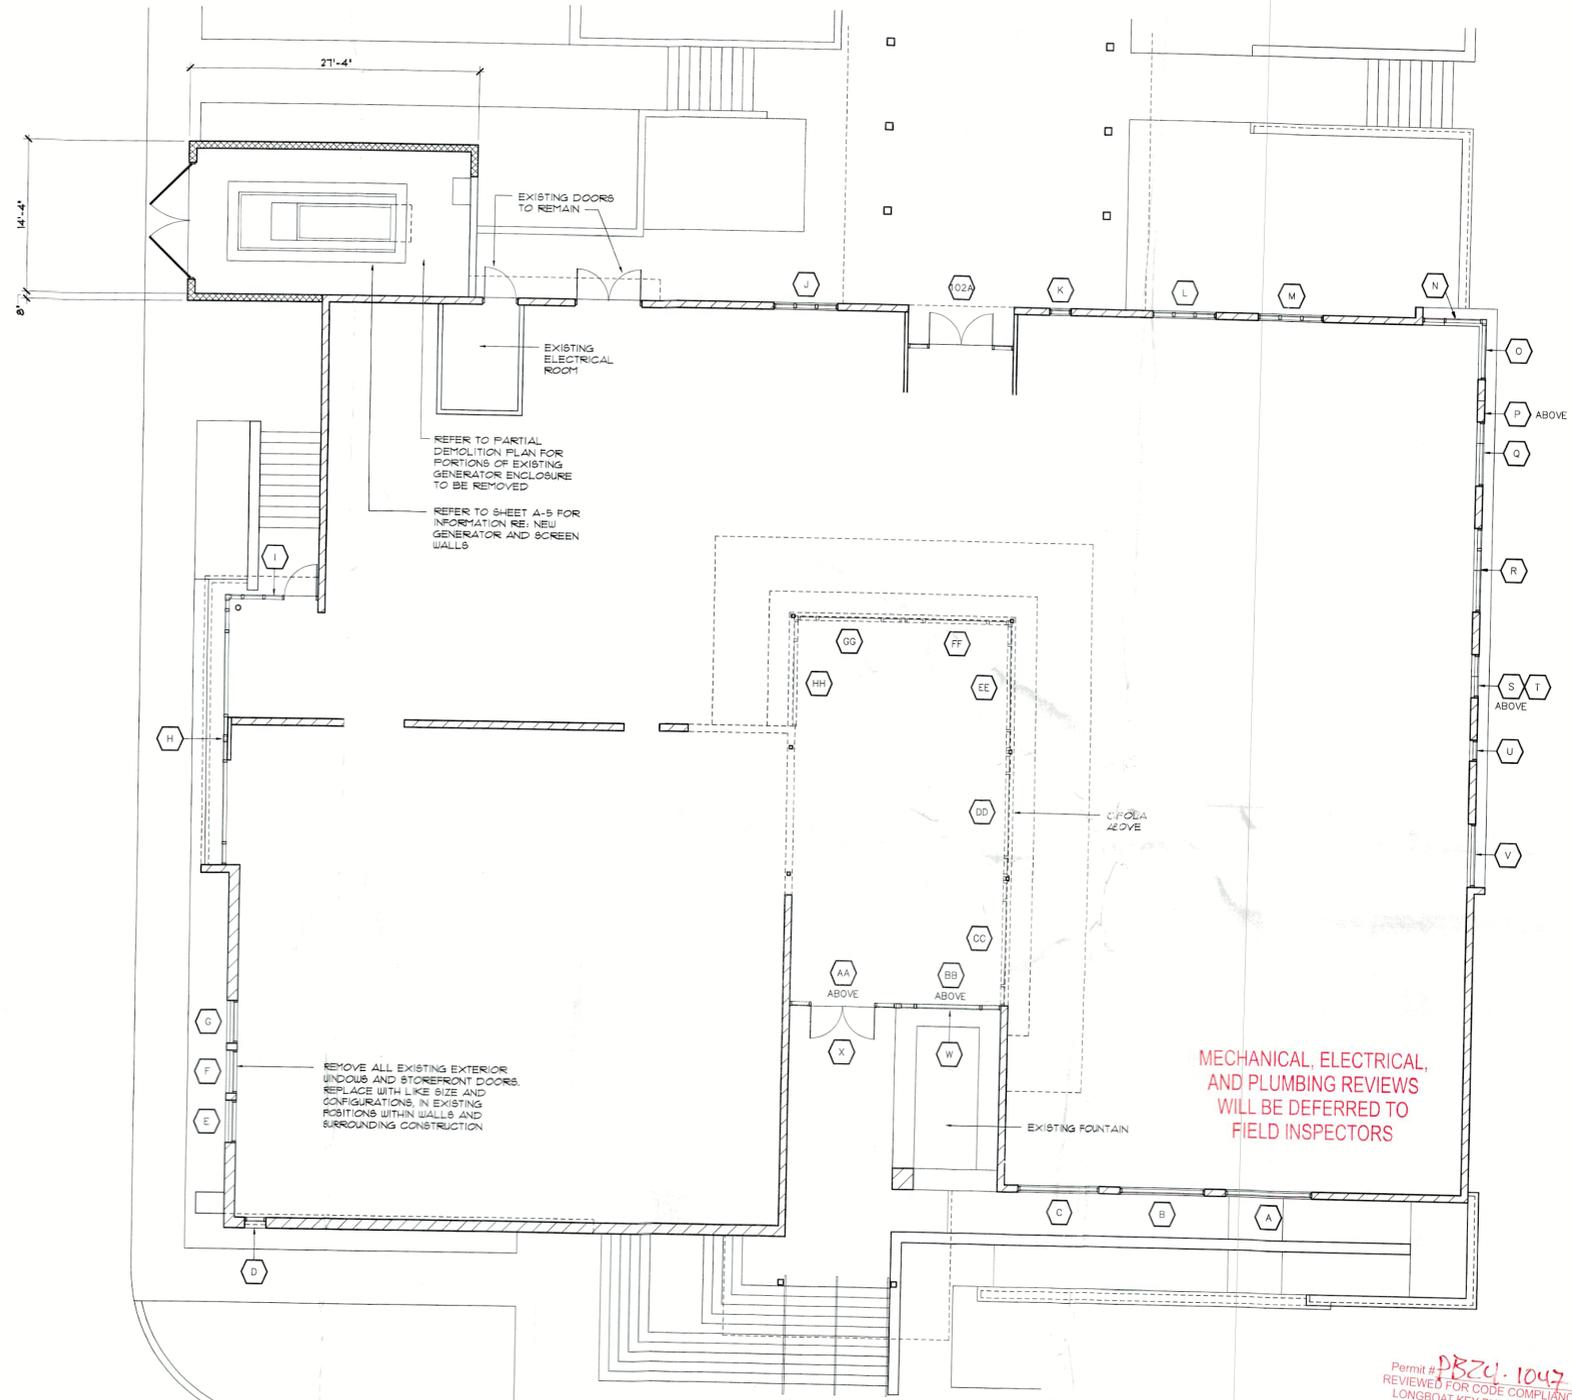

**WINDOW REPLACEMENT BUILDING PLAN**  
SCALE: 1/8" = 1'-0"

Permit # **DBCU-1047**  
REVIEWED FOR CODE COMPLIANCE  
LONGBOAT KEY BUILDING DEPT.  
DEC 04 2024  
APPROVED  
Reviewer: *Janthan*

BLDG PERMIT PLANS  
FILE  
Copy of Record

**RECEIVED**  
SEP 10 2024  
TOWN OF LONGBOAT KEY

TO THE BEST OF THIS ARCHITECT'S KNOWLEDGE, SAID PLANS AND SPECIFICATIONS COMPLY WITH THE APPLICABLE MINIMUM BUILDING CODES AND APPLICABLE MINIMUM FIRE SAFETY STANDARDS AS DETERMINED IN ACCORDANCE WITH CHAPTERS 553 AND 633, LAWS OF FLORIDA. UNLOADING HAS BEEN DESIGNED IN ACCORDANCE WITH THE FLORIDA BUILDING CODE, SECTION 1609, EIGHTH (2023) EDITION.

**REVISIONS**




**Randall Paul Sample**  
ARCHITECT  
46 NORTH WASHINGTON BOULEVARD, SUITE 12  
BARNSDALE, FLORIDA 34236  
P: (941) 362-0414  
E: rps@randallpaulsample.com

WINDOW REPLACEMENT / GENERATOR ENCLOSURE / REROOF  
**LONGBOAT KEY TOWN HALL IMPROVEMENTS**  
501 BAY ISLES ROAD  
LONGBOAT KEY, FLORIDA 34228

DATE  
9/6/24  
FILE  
24006  
SHEET  
**A-1**  
OF 6

DOOR TYPE	MARK	SIZE (W x H)	DESCRIPTION	DESIGN WIND PRESSURE (SERVICE LOAD (ASD))	RATED DESIGN WIND PRESSURE (SPECIFIED UNIT, PSF) (SERVICE LOAD)	REF. # / REMARKS	NOTICE OF ACCEPTANCE ACCEPTANCE NUMBER (OR OTHER APPROVED TEST)
A	D1	(2) 3'-0" x 7'-9 1/2"	ALUMINUM STOREFRONT DOOR	ZONE 5 +30.4 / -38.4	+10.0 / -10.0	HU SET #1	FL 426(TU)
B	D2	3'-0" x 7'-9 1/2"	ALUMINUM STOREFRONT DOOR	ZONE 5 +30.4 / -38.4	+10.0 / -10.0	HU SET #2	FL 426(TU)
A	D3	(2) 3'-0" x 7'-9 1/2"	ALUMINUM STOREFRONT DOOR	ZONE 5 +30.4 / -38.4	+10.0 / -10.0	HU SET #2	FL 426(TU)



**DOOR SCHEDULE NOTES**

- EXTERIOR DOORS TO RECEIVE GLAZING SHALL BE GLAZED AS DESCRIBED IN GLAZING TABLE, THIS SHEET.
- ALL GLAZED EXTERIOR DOOR ASSEMBLIES SHALL BE IMPACT-RESISTANT AND MEET THE REQUIREMENTS OF 907D 12, ASTM E 1886, AND ASTM E 1996 OR MIAMI-DADE PA 201, 202, AND 203.
- STOREFRONT DOORS SHALL BE TRULITE SERIES 351.
- ALL EXTERIOR DOOR ASSEMBLIES SHALL BE INSTALLED IN STRICT COMPLIANCE WITH INDICATED NOTICE OF ACCEPTANCE (NOA) OR FLORIDA PRODUCT APPROVAL.
- ALL HARDWARE SHALL MEET ADA REQUIREMENTS AND THE REQUIREMENTS OF THE FLORIDA BUILDING CODE - ACCESSIBILITY.
- ALUMINUM FINISH AT STOREFRONT SYSTEM DOORS AND FRAMES SHALL BE BRONZE ANODIZED (MATCH EXISTING).

**DOOR HARDWARE NOTES**

- PROVIDE ALL MISCELLANEOUS HARDWARE CUSTOMARY TO EACH INSTALLATION, INCLUDING STRIKES, WALL OR FLOOR MOUNTED DOOR BUMPERS WITH CONCEALED, TAMPERPROOF FASTENING, ETC.
- FASTENING OF THRESHOLDS TO CONCRETE SLAB SUBSTRATES SHALL BE WITH MACHINE SCREWS INTO DOUBLE EXPANSION CONCRETE ANCHORS. SET THRESHOLDS IN FULL BED OF BUTYL-RUBBER OR POLYISOBUTYLENE MASTIC SEALANT.
- CLOSERS SHALL BE SURFACE-MOUNTED YALE 5800 OR EQUIVALENT WITH REDUCED OPENING FORCE AND DELAYED ACTION FEATURE, 690 FINISH.
- HARDWARE MOUNTING HEIGHTS SHALL BE IN ACCORDANCE WITH THE DOOR AND HARDWARE INSTITUTE'S RECOMMENDED LOCATIONS FOR BUILDER'S HARDWARE FOR STANDARD STEEL DOORS AND FRAMES EXCEPT AS OTHERWISE INDICATED.

ENCLOSED STRUCTURE  
 BASIC WIND SPEED: 150 MPH  
 RISK CATEGORY II  
 WIND EXPOSURE: C  
 INTERNAL PRESSURE COEFFICIENT: +/- 0.18  
 BUILDING HEIGHT: 30'-0"

**HARDWARE SETS**

- HINGES: BY DOOR MFR PER FPA, (3) BUTT PER LEAF  
 -CLOSER: YALE 5800 (ONE PER LEAF)  
 -EXIT DEVICE: DOR-O-MATIC 1600 2013 FINISH (ONE PER LEAF)  
 -PULL HANDLE SET: 9" CTC BY DOOR MFR (BOTH LEAVES)  
 -LEATHERSTRIPPING: PER FPA  
 -THRESHOLD: BUMPER THRESHOLD, ACCESSIBLE, PER FPA
- HINGES: BY DOOR MFR PER FPA, (3) BUTT PER LEAF  
 -CLOSER: YALE 5800  
 -EXIT DEVICE: DOR-O-MATIC 1600 2013 FINISH  
 -PULL HANDLE SET: 9" CTC BY DOOR MFR  
 -LEATHERSTRIPPING: PER FPA  
 -THRESHOLD: BUMPER THRESHOLD, ACCESSIBLE, PER FPA

NOTE: HARDWARE FOR EXTERIOR DOOR ASSEMBLIES SHALL BE AS SPECIFIED, LOCATED, AND INSTALLED PER TESTING LITERATURE NOTED IN DOOR SCHEDULE ABOVE, UNLESS OTHERWISE INDICATED.

MARK	SIZE (MO.) (W x H)	DESCRIPTION	DESIGN WIND PRESSURE (SERVICE LOAD (ASD))	RATED DESIGN WIND PRESSURE (SPECIFIED UNIT, PSF) (SERVICE LOAD)	REF. # / REMARKS	NOTICE OF ACCEPTANCE ACCEPTANCE NUMBER (OR OTHER APPROVED TEST)
A	8'-0" x 4'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -32.5 / -35.3	+0.0 / -0.0	-	FL 4546(0)
B	8'-0" x 4'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -32.5 / -35.3	+0.0 / -0.0	-	FL 4546(0)
C	8'-0" x 4'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 5 -32.5 / -42.4	+0.0 / -0.0	-	FL 4546(0)
D	2'-0" x 16'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 5 -32.5 / -42.4	+0.0 / -0.0	-	FL 4546(0)
E	4'-0" x 10'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -32.5 / -35.3	+0.0 / -0.0	-	FL 4546(0)
F	4'-0" x 10'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -32.5 / -35.3	+0.0 / -0.0	-	FL 4546(0)
G	4'-0" x 10'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -32.5 / -35.3	+0.0 / -0.0	-	FL 4546(0)
H	25'-2" x 8'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 5 -32.5 / -35.3	+0.0 / -0.0	-	FL 4546(0)
I	9'-2 3/8" x 8'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 5 -30.4 / -38.4	+0.0 / -0.0	-	FL 4546(0)
J	6'-0" x 4'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -32.5 / -35.3	+0.0 / -0.0	-	FL 4546(0)
K	2'-0" x 2'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -34.0 / -36.9	+0.0 / -0.0	-	FL 4546(0)
L	6'-0" x 4'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -32.5 / -35.3	+0.0 / -0.0	-	FL 4546(0)
M	6'-0" x 4'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -32.5 / -35.3	+0.0 / -0.0	-	FL 4546(0)
N	6'-0" x 6'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 5 -32.5 / -42.4	+0.0 / -0.0	-	FL 4546(0)
O	9'-0" x 6'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 5 -32.5 / -42.4	+0.0 / -0.0	-	FL 4546(0)
P	4'-0" x 2'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -34.0 / -36.9	+0.0 / -0.0	-	FL 4546(0)
Q	6'-0" x 2'-4"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -32.5 / -35.3	+0.0 / -0.0	-	FL 4546(0)
R	8'-0" x 4'-1 3/8"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -32.5 / -35.3	+0.0 / -0.0	-	FL 4546(0)
S	2'-0" x 2'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -34.0 / -36.9	+0.0 / -0.0	-	FL 4546(0)
T	4'-0" x 2'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -34.0 / -36.9	+0.0 / -0.0	-	FL 4546(0)
U	2'-0" x 4'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -34.0 / -36.9	+0.0 / -0.0	-	FL 4546(0)
V	6'-0" x 8'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -32.5 / -35.3	+0.0 / -0.0	-	FL 4546(0)
W	9'-5 1/2" x 6'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 5 -30.4 / -38.4	+0.0 / -0.0	-	FL 4546(0)
X	9'-9 1/2" x 8'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 5 -30.4 / -38.4	+0.0 / -0.0	-	FL 4546(0)
AA	9'-9 1/2" x 5'-10"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 5 -30.4 / -38.4	+0.0 / -0.0	-	FL 4546(0)
BB	9'-5 1/2" x 5'-10"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 5 -30.4 / -38.4	+0.0 / -0.0	-	FL 4546(0)
CC	11'-9 1/2" x 5'-10"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 5 -30.4 / -38.4	+0.0 / -0.0	-	FL 4546(0)
DD	11'-8" x 5'-10"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -30.4 / -33.3	+0.0 / -0.0	-	FL 4546(0)
EE	11'-9 1/2" x 5'-10"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 5 -30.4 / -38.4	+0.0 / -0.0	-	FL 4546(0)
FF	9'-9 1/2" x 5'-10"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 5 -30.4 / -38.4	+0.0 / -0.0	-	FL 4546(0)
GG	9'-8 1/2" x 5'-10"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 5 -30.4 / -38.4	+0.0 / -0.0	-	FL 4546(0)
HH	9'-11 1/2" x 5'-10"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 5 -30.4 / -38.4	+0.0 / -0.0	-	FL 4546(0)
102A	9'-8" x 8'-0"	ALUMINUM STOREFRONT (TRULITE 3100 SERIES)	ZONE 4 -30.4 / -38.4	+0.0 / -0.0	-	FL 4546(0)

**WINDOW SCHEDULE NOTES**



- GLAZING IN STOREFRONT WINDOWS SHALL BE IMPACT RESISTANT LAMINATED IG GLASS PER GLAZING TABLE, THIS SHEET.
- ALL EXTERIOR WINDOW ASSEMBLIES SHALL BE INSTALLED IN STRICT COMPLIANCE WITH INDICATED NOTICE OF ACCEPTANCE (NOA).
- FINISH AT ALUMINUM FRAMES SHALL BE BRONZE ANODIZED (MATCH EXISTING).
- REFER TO WINDOW ELEVATIONS FOR STOREFRONT FRAME CONFIGURATIONS.
- FIELD VERIFY ROUGH OPENINGS PRIOR TO ORDERING AND FABRICATING STOREFRONTS.

**WINDOW AND DOOR GLAZING**

STOREFRONT DOORS (TRULITE 351)  
 LAMI MONOLITHIC  
 MONO LITE: 1/4" H8 / 290 PVB / 1/4" H8 LAMINATED,  
 CLEAR GLASS (9/16" THICK TOTAL)  
 LOW-E COATING ON SURFACE 2 OR 3

STOREFRONT WINDOWS (TRULITE 3100), VISION  
 1 5/16" NOM. LAMI IG  
 OUTBOARD LITE: 1/4" H8 / 290 SENTRYGLASS / 1/4" H8 LAMINATED,  
 CLEAR GLASS (9/16" NOM. THICK TOTAL)  
 AIR SPACE: 1/2", WITH LOW-E COATING (SURFACE 2 OR 3)  
 INBOARD LITE: 1/4" TEMPERED, CLEAR GLASS

STOREFRONT WINDOWS (TRULITE 3100), SPANDREL  
 1 5/16" NOM. LAMI IG  
 OUTBOARD LITE: 1/4" H8 / 290 SENTRYGLASS / 1/4" H8 LAMINATED,  
 CLEAR GLASS (9/16" NOM. THICK TOTAL)  
 AIR SPACE: 1/2", WITH LOW-E COATING (SURFACE 2 OR 3)  
 INBOARD LITE: 1/4" TEMPERED, CLEAR GLASS  
 WITH CERAMIC FRIT %

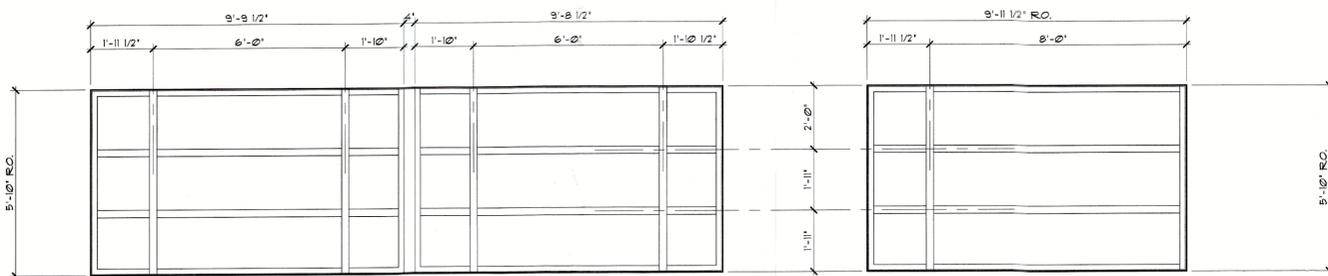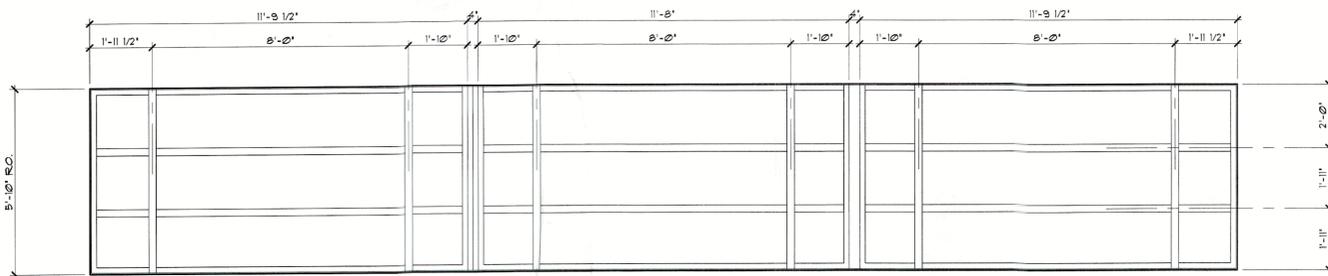

**WINDOW ELEVATIONS**

SCALE: 3/8" = 1'-0"

NOTE: STOREFRONT SYSTEM FABRICATOR SHALL FIELD VERIFY ALL DIMENSIONS

**REVISIONS**



**Randall Paul Sample**  
 ARCHITECT  
 46 NORTH WASHINGTON BOULEVARD SUITE 12  
 SARASOTA, FLORIDA 34236  
 P (941) 362-0414  
 E-HALL: rps@rpsarchitect.com


WINDOW REPLACEMENT / GENERATOR ENCLOSURE / REROOF  
**LONGBOAT KEY TOWN HALL IMPROVEMENTS**  
 LONGBOAT KEY, FLORIDA 34228  
 501 BAY ISLES ROAD

RECEIVED  
 SEP 10 2024  
 TOWN OF LONGBOAT KEY  
 Planning, Zoning & Building

TO THE BEST OF THIS ARCHITECT'S KNOWLEDGE, SAID PLANS AND SPECIFICATIONS COMPLY WITH THE APPLICABLE MINIMUM BUILDING CODES AND APPLICABLE MINIMUM FIRE SAFETY STANDARDS AS DETERMINED IN ACCORDANCE WITH CHAPTERS 553 AND 633, LAWS OF FLORIDA. UNLOADING HAS BEEN DESIGNED IN ACCORDANCE WITH THE FLORIDA BUILDING CODE, SECTION 909.8(2)(b) (2022) EDITION.

DATE  
 9/6/24  
 FILE  
 24006

SHEET  
**A-2**  
 OF 6




**Randall Paul Sample**  
ARCHITECT  
46 NORTH WASHINGTON BOULEVARD SUITE 112  
LONGBOAT KEY, FLORIDA 34228  
E-MAIL: rps@architectsignal.com


WINDOW REPLACEMENT / GENERATOR ENCLOSURE / ROOF  
**LONGBOAT KEY TOWN HALL IMPROVEMENTS**  
501 BAY ISLES ROAD  
LONGBOAT KEY, FLORIDA 34228

DATE  
9/6/24  
FILE  
24006

SHEET  
**A-3**  
OF 6

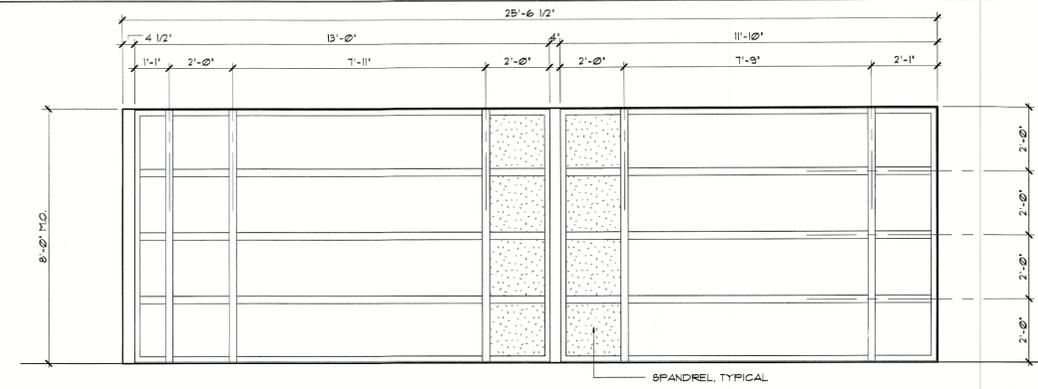


H

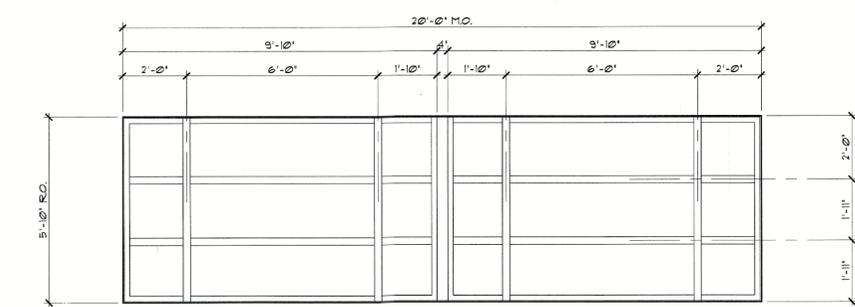


AA

BB

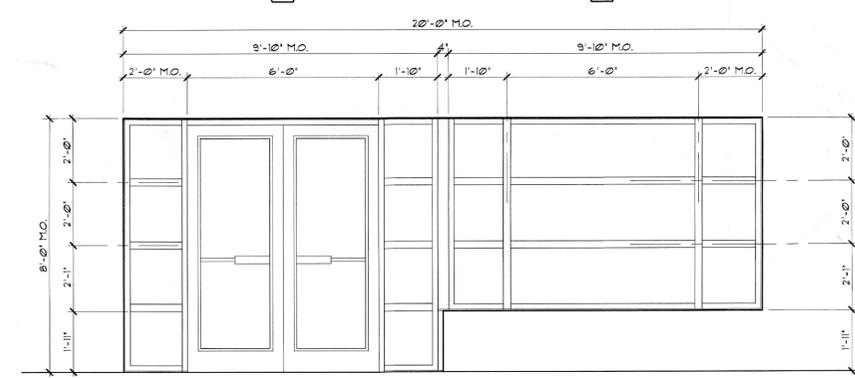


X


W

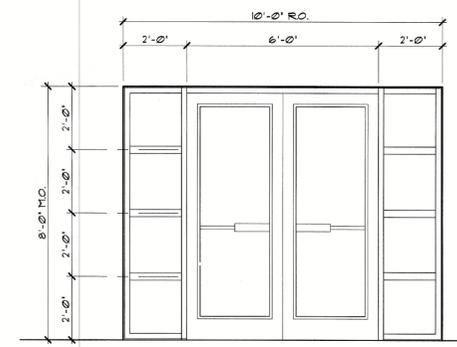


102A

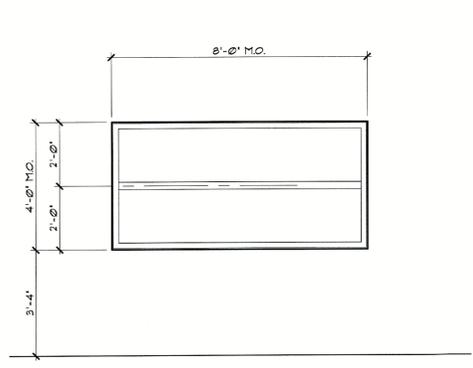


A B C

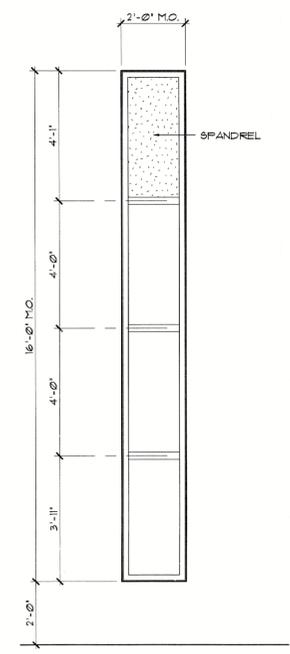


D

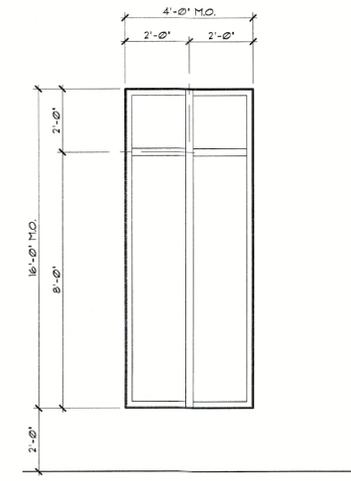


E F G

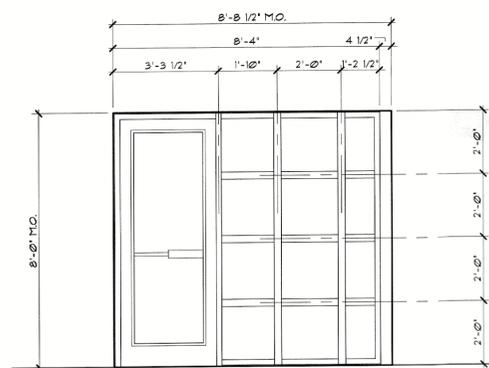


I

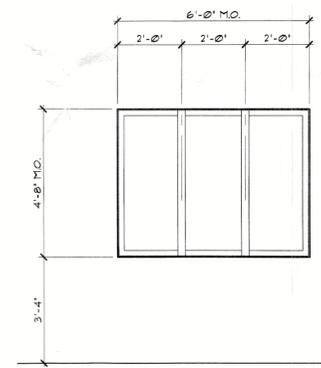

J L M

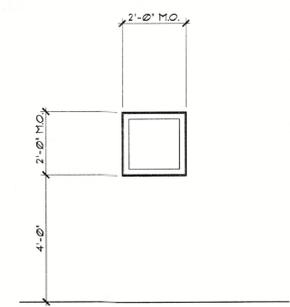

K

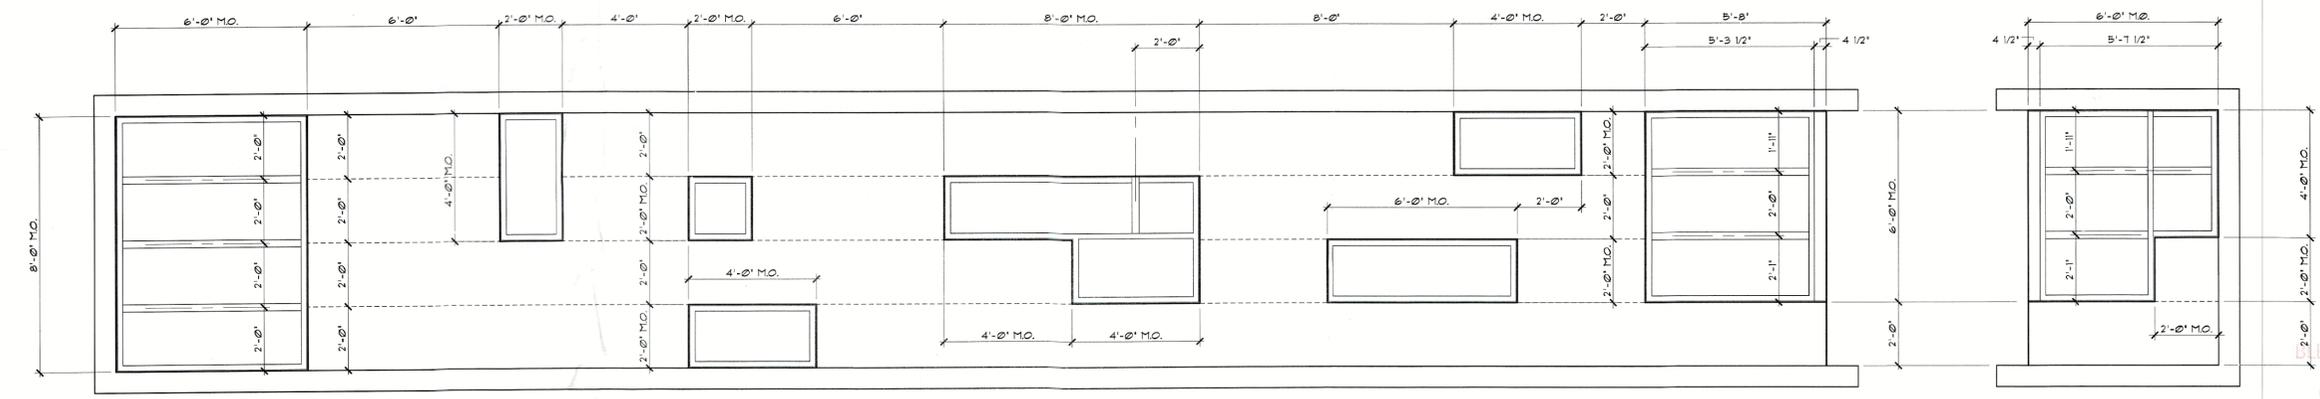

V

U

S T  
ABOVE

R

Q

P  
ABOVE


O

N

RECEIVED  
LDG PERMIT PLANS FILE  
Copy of Record  
SEP 10 2024  
TOWN OF LONGBOAT KEY  
Planning, Zoning & Building

**WINDOW ELEVATIONS**  
SCALE: 3/8" = 1'-0"

NOTE: STOREFRONT SYSTEM  
FABRICATOR SHALL FIELD  
VERIFY ALL DIMENSIONS




**Randall Paul Sample**  
ARCHITECT  
46 NORTH WASHINGTON BOULEVARD SUITE 12  
SARASOTA, FLORIDA 34236 SARAS  
E-MAIL: rps@randallpaul.com

WINDOW REPLACEMENT / GENERATOR ENCLOSURE / REROOF  
**LONGBOAT KEY TOWN HALL IMPROVEMENTS**  
501 BAY ISLES ROAD  
LONGBOAT KEY, FLORIDA 34228

DATE  
9/6/24  
FILE  
24006

SHEET  
**A-4**  
OF 6

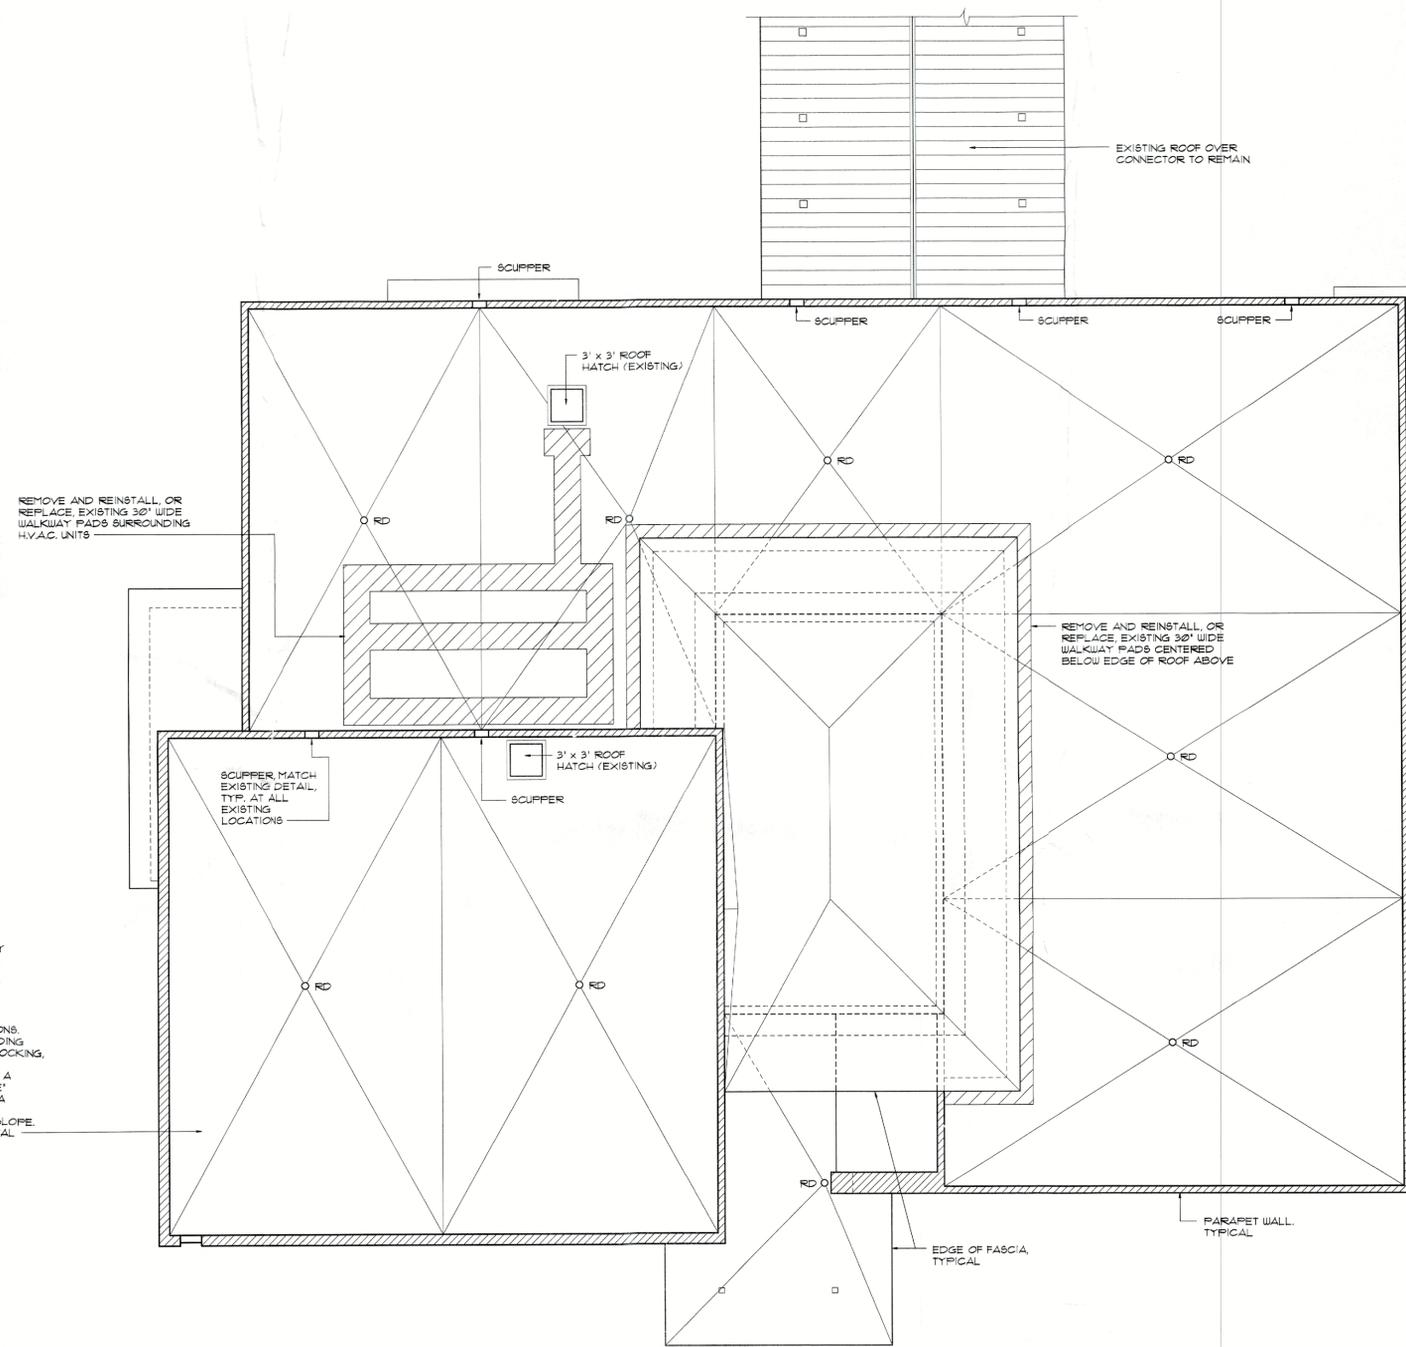

WHITE ADHERED 60 MIL SINGLE-PLY MEMBRANE ROOFING SYSTEM OVER TAPERED RIGID INSULATION (1" MINIMUM THICKNESS, COMPATIBLE WITH MEMBRANE SYSTEM) OVER EXISTING SUBSTRATE. INSTALL SYSTEM PER MANUFACTURER'S INSTRUCTIONS AND RECOMMENDATIONS. PROVIDE ALL ACCESSORIES, INCLUDING FLASHINGS, EDGE STOPS, GANTS, BLOCKING, FIRE FLASHINGS, CURB FLASHINGS, AND WALL CAPS AS REQUIRED FOR A COMPLETE INSTALLATION ("ELEVATE" ULTRAFLY TPO MEMBRANE, FLORIDA PRODUCT APPROVAL 102641-R13). 1/4" PER FOOT MINIMUM INSULATION SLOPE. PROVIDE SUBMITTALS FOR APPROVAL.

BLDG PERMIT PLANS  
FILE  
Copy of Record  
**ROOF PLAN**  
SCALE: 1/8" = 1'-0"

RECEIVED  
SEP 10 2024  
TOWN OF LONGBOAT KEY  
Planning, Zoning & Building

TO THE BEST OF THIS ARCHITECT'S KNOWLEDGE, SAID PLANS AND SPECIFICATIONS COMPLY WITH THE APPLICABLE MINIMUM BUILDING CODES AND APPLICABLE MINIMUM FIRE SAFETY STANDARDS AS DETERMINED IN ACCORDANCE WITH CHAPTERS 905 AND 903, LAWS OF FLORIDA. UNLOADINGS HAS BEEN DESIGNED IN ACCORDANCE WITH THE FLORIDA BUILDING CODE, SECTION 1609, EIGHTH (2023) EDITION.

**GENERAL NOTES**


1. FIELD LOCATE AND VERIFY ALL UTILITY AND METER LOCATIONS.
2. CONTRACTOR SHALL VERIFY ALL DIMENSIONS, SPECIFICATIONS, AND CONDITIONS PRIOR TO CONSTRUCTION.
3. ALL CONSTRUCTION SHALL COMPLY WITH ALL LOCAL BUILDING CODES AND ORDINANCES AS WELL AS ESTABLISHED GOOD BUILDING PRACTICES.
4. DO NOT SCALE DRAWINGS. USE DIMENSIONS GIVEN ON DRAWINGS. IF A DIMENSION IS NOT GIVEN OR IT CONFLICTS WITH OTHER DRAWING INFORMATION, CONSULT ARCHITECT FOR CLARIFICATION.

OPEN STRUCTURE  
 BASIC WIND SPEED, ULTIMATE: 150 MPH, 3 SECOND GUST  
 BASIC WIND SPEED, NOMINAL: 116 MPH  
 RISK CATEGORY II  
 WIND EXPOSURE: C  
 INTERNAL PRESSURE COEFFICIENT: N/A


**TERMITE TREATMENT**

AT NEW SLAB-ON-GRADE CONSTRUCTION, PROVIDE SOIL TREATMENT FOR TERMITE CONTROL. ENGAGE A LICENSED PROFESSIONAL PEST CONTROL OPERATOR FOR APPLICATION OF SOIL TREATMENT. FURNISH WRITTEN FIVE-YEAR WARRANTY CERTIFYING THAT APPLIED SOIL TREATMENT WILL PREVENT THE INFESTATION OF SUB-TERRANEAN TERMITES AND THAT IF TERMITE ACTIVITY IS DISCOVERED, CONTRACTOR WILL RETREAT SOIL AND REPAIR OR REPLACE DAMAGE CAUSED BY TERMITE INFESTATION. FOLLOW ALL TERMITE-RELATED PROVISIONS OF THE FLORIDA BUILDING CODE, LATEST EDITION. PROVIDE A WEATHER-RESISTANT JOB SITE POSTING BOARD TO RECEIVE DUPLICATE TREATMENT CERTIFICATES AS EACH PROTECTIVE TREATMENT IS COMPLETED. IF THE SOIL CHEMICAL BARRIER METHOD IS USED, FINAL EXTERIOR TREATMENT SHALL BE COMPLETED PRIOR TO FINAL BUILDING APPROVAL. THE FINAL CERTIFICATE SHALL BE PERMANENTLY POSTED IN AN OBVIOUS, ACCESSIBLE LOCATION.


NO CONDENSATE LINES OR ROOF DOWNSPOUTS SHALL DISCHARGE WITHIN 1'-0" OF THE STRUCTURE. IRRIGATION/SPRINKLER SYSTEMS, INCLUDING ALL RISERS AND SPRAY, SHALL NOT BE INSTALLED WITHIN 1'-0" OF THE STRUCTURE.

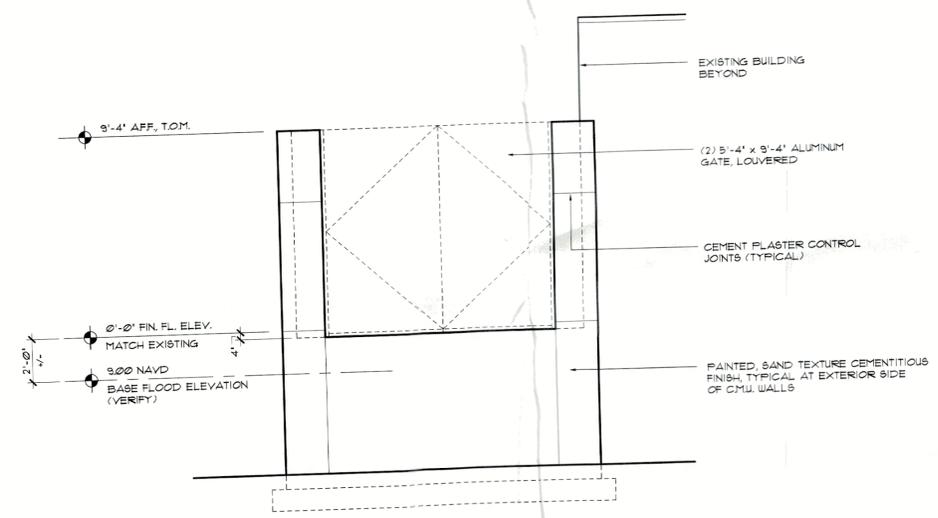


**WEST ELEVATION**  
 SCALE: 1/4" = 1'-0"

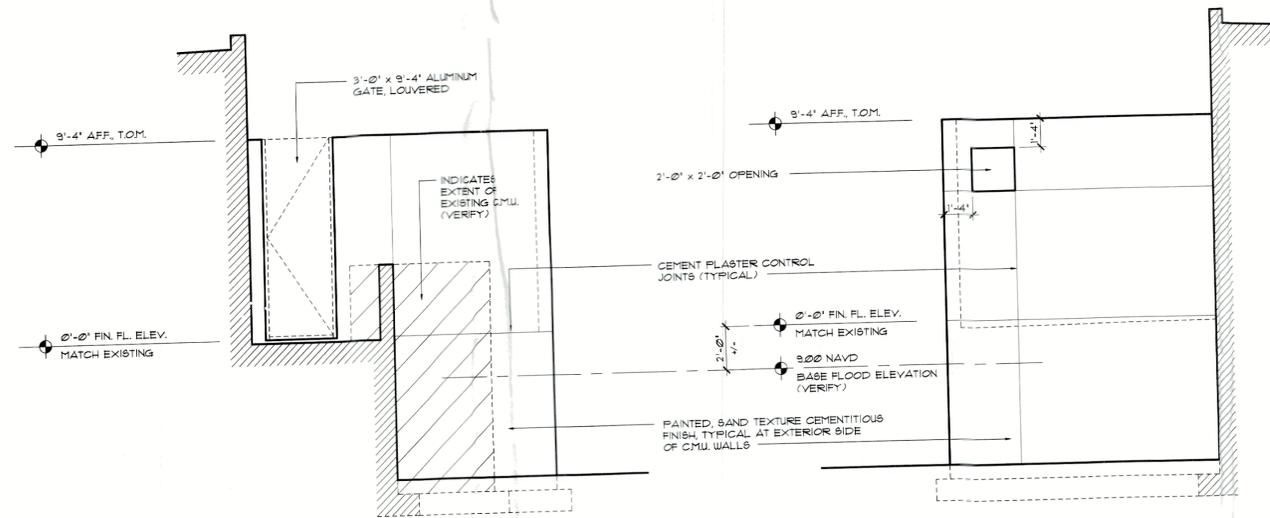

**EAST ELEVATION**  
 SCALE: 1/4" = 1'-0"

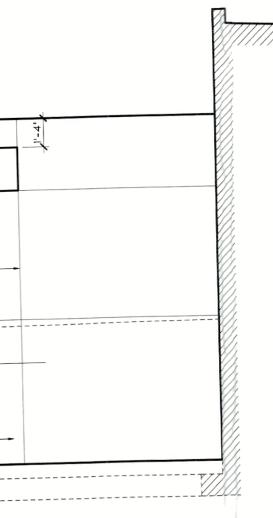


**SOUTH ELEVATION**  
 SCALE: 1/4" = 1'-0"

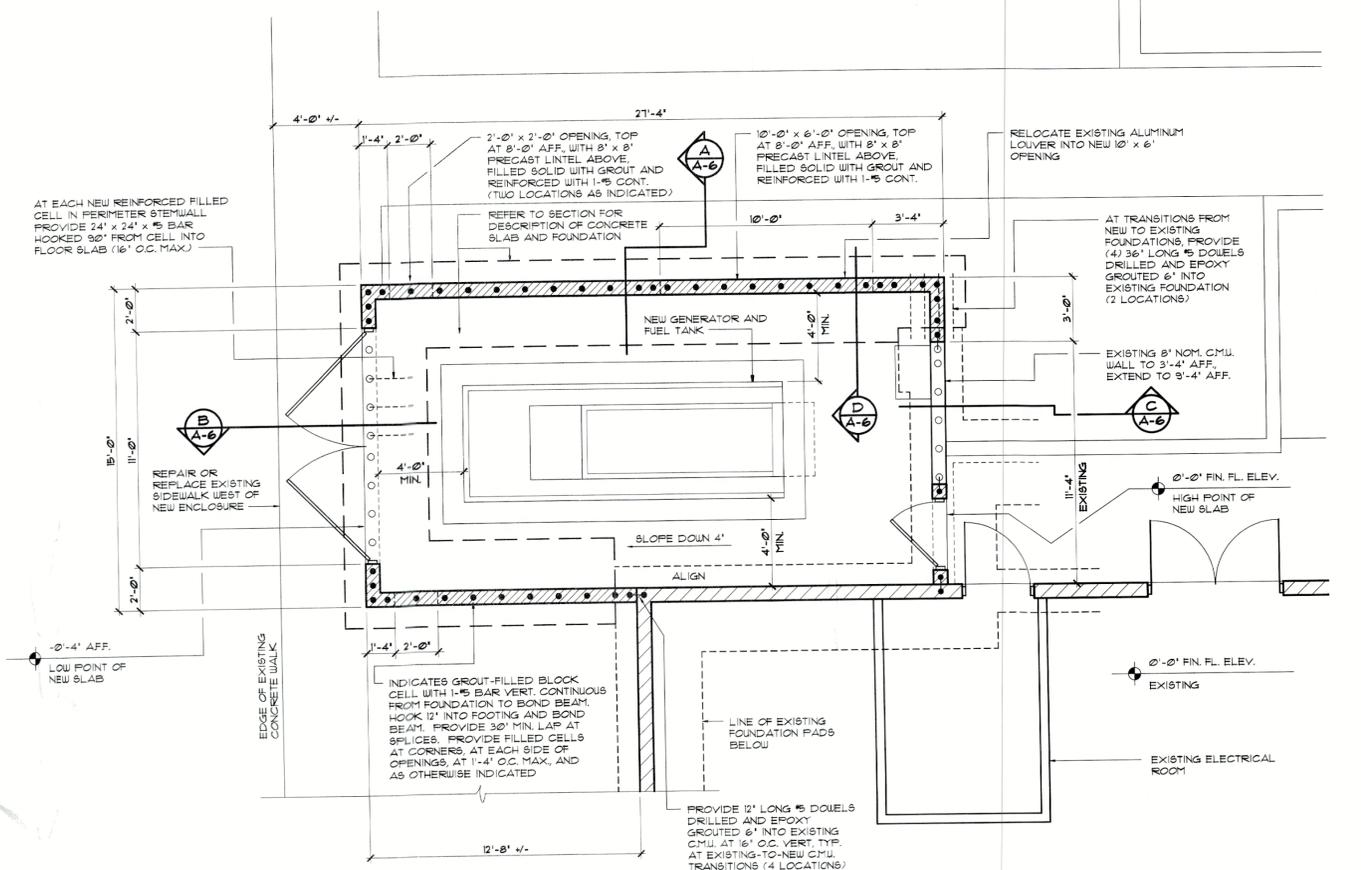

**PARTIAL FLOOR AND FOUNDATION PLAN**  
 SCALE: 3/4" = 1'-0"

- 1-# BAR VERT. IN FILLED CELLS (1/2" BAR IN 12" NOM. CMU)
- 1-# BAR VERT. IN FILLED CELLS (TO TOP COURSE OF STEINWALL OR ABOVE EXISTING LOW WALL, AS APPLICABLE)

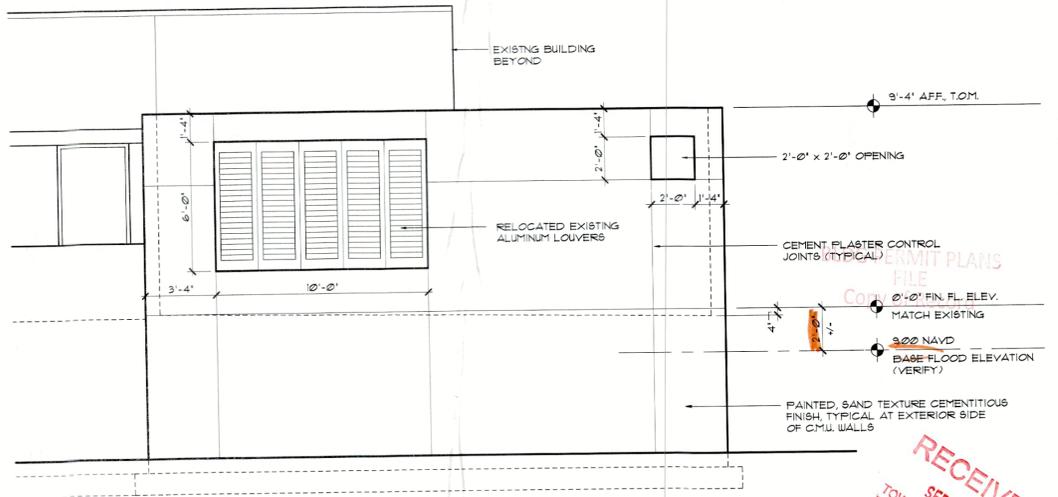

**NORTH ELEVATION**  
 SCALE: 1/4" = 1'-0"

**REVISIONS**




**Randall Paul Sample**  
 ARCHITECT  
 46 NORTH WASHINGTON BOULEVARD, SUITE 12  
 SARASOTA, FLORIDA 34236  
 P: (941) 367-6414  
 E-MAIL: rps@randallpaulsample.com

WINDOW REPLACEMENT / GENERATOR ENCLOSURE / REROOF  
**LONGBOAT KEY TOWN HALL IMPROVEMENTS**  
 LONGBOAT KEY, FLORIDA 34228  
 501 BAY ISLES ROAD


DATE  
 9/6/24  
 FILE  
 24006

SHEET  
**A-5**  
 OF 6




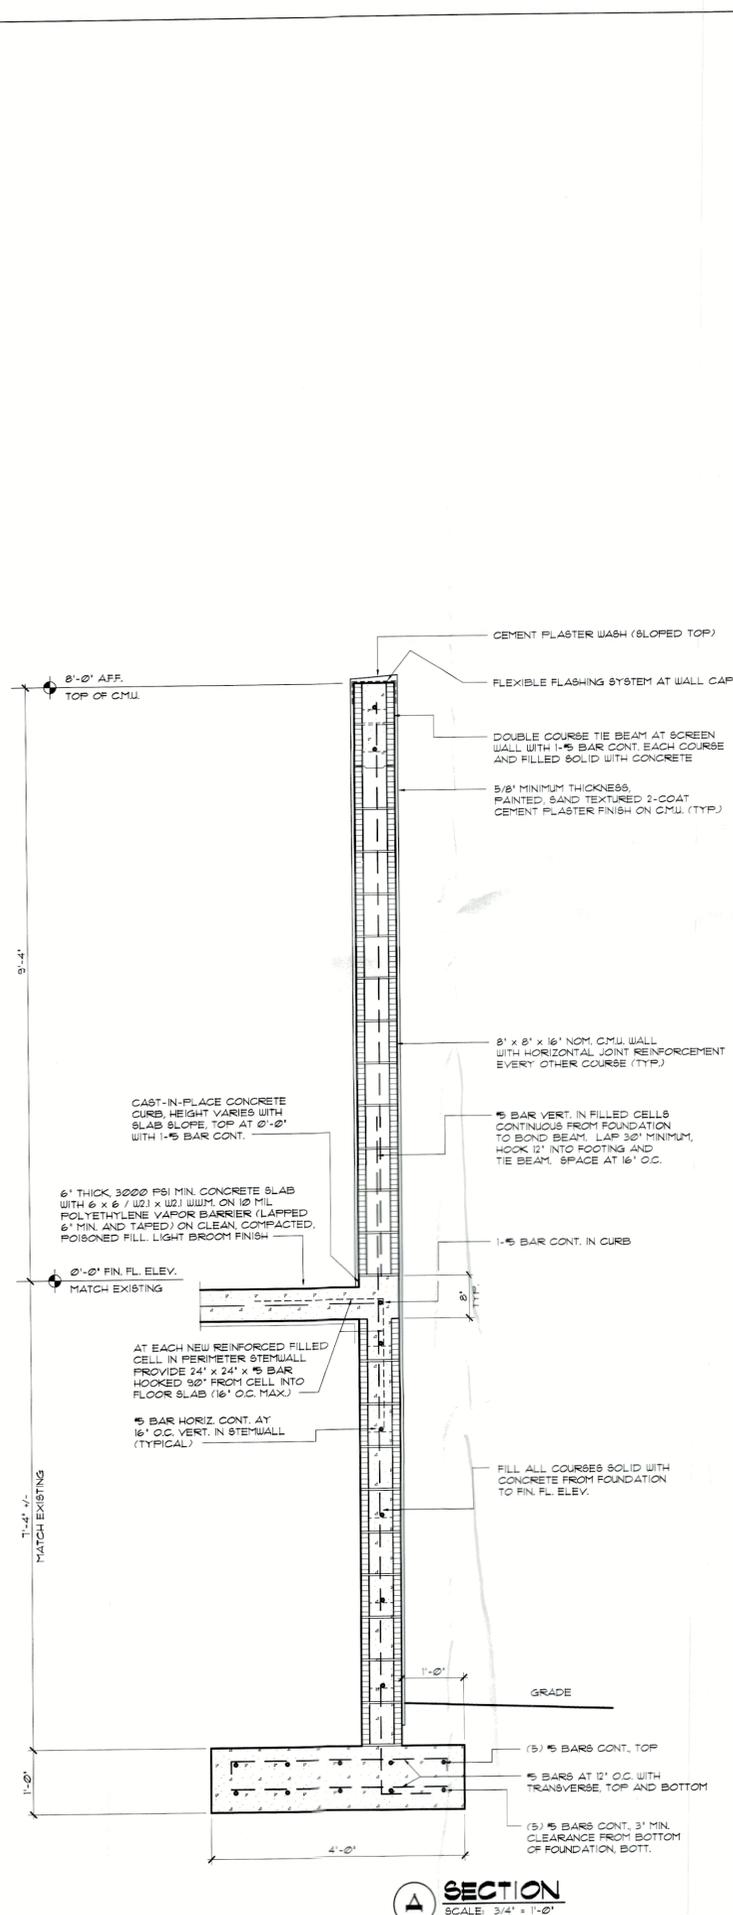


**A SECTION**  
SCALE: 3/4" = 1'-0"

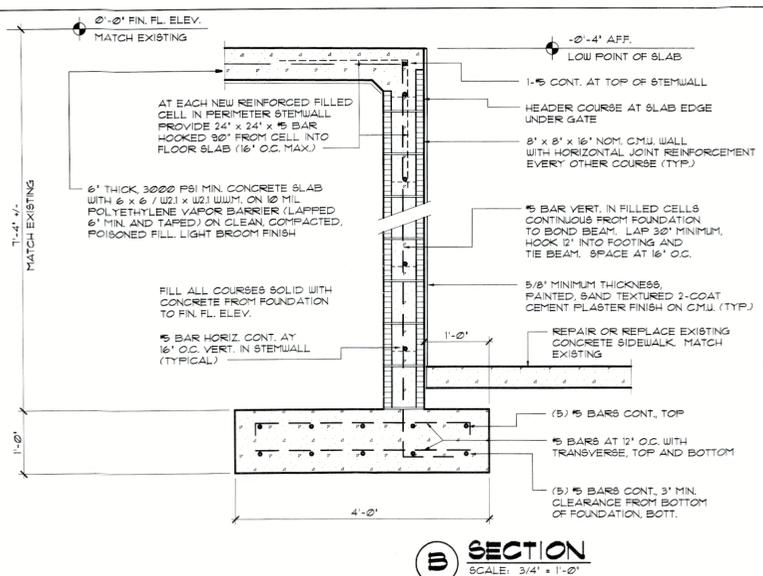


**B SECTION**  
SCALE: 3/4" = 1'-0"

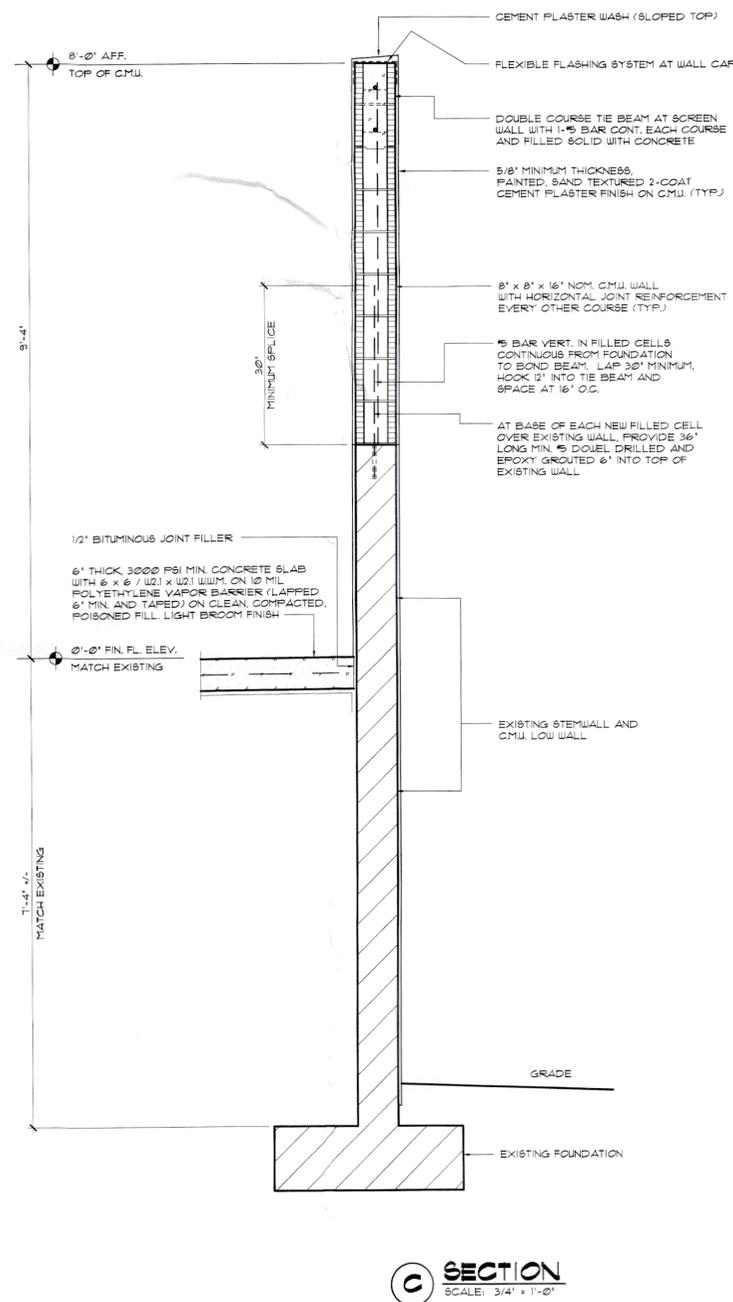

**C SECTION**  
SCALE: 3/4" = 1'-0"

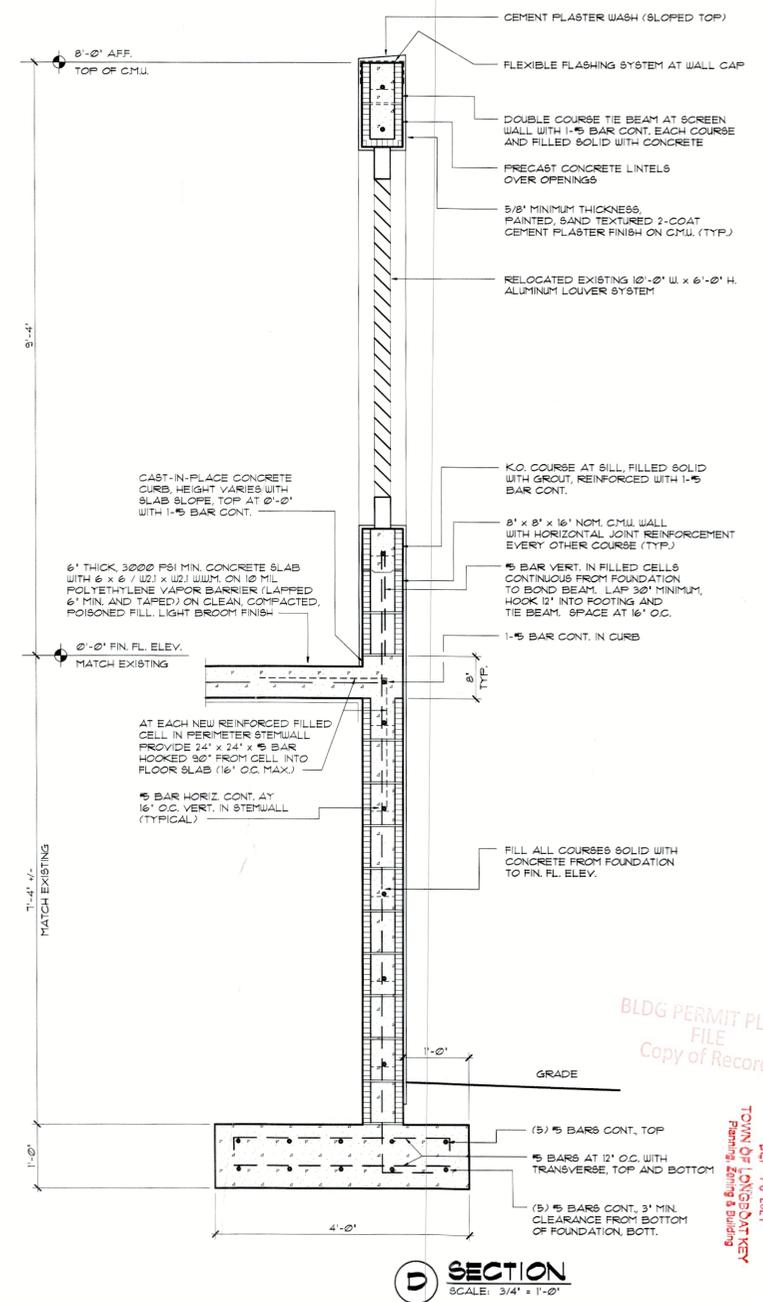

**D SECTION**  
SCALE: 3/4" = 1'-0"

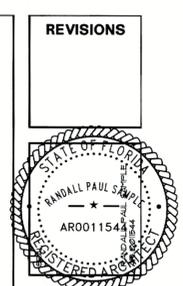

**Randall Paul Sample**  
ARCHITECT  
14 NORTH WASHINGTON BOULEVARD  
SUITE 10  
BOCA RATON, FLORIDA 33433  
P: (561) 362-0414  
E: rps@rpsarchitect.com

WINDOW REPLACEMENT / GENERATOR ENCLOSURE / REROOF  
**LONGBOAT KEY TOWN HALL IMPROVEMENTS**  
LONGBOAT KEY, FLORIDA 34228  
501 BAY ISLES ROAD

BLDG PERMIT PLANS  
FILE  
Copy of Record

RECEIVED  
SEP 10 2024  
TOWN OF LONGBOAT KEY  
Planning, Zoning & Building

DATE  
9/6/24  
FILE  
24006  
SHEET  
**A-6**  
OF 6