O.M.B. No 3067-0077 Expires May 31, 1993

ELEVATION CERTIFICATE FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

TTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME HUNT BUILDING CORP.	POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER	COMPANY NAIC NUMBER
508-510 Forest WAY OTHER DESCRIPTION (Lot and Block Numbers, etc.)	
BUILDING 2, CEDARS EAST, SECTION II	

CITY

ZIP CODE

STATE

SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION

Provide the following from the proper FIRM (See Instructions):

1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)
125126	0005	С	10/01/83	A 13	

SECTION C BUILDING ELEVATION INFORMATION

6. The elevation of the lowest grade immediately adjacent to the building is: 6. Section B, Item 7).	8 feet NGVD (or other FIRM datum-see
5. The reference level elevation is based on: 🖾 actual construction 🗌 construction drawings is only valid if the building does not yet have the case this certificate will only be valid for the building during the course of construction. Will be required once construction is complete.)	reference level floor in place, in which
4. Elevation reference mark used appears on FIRM: Yes X No (See Instructions on	16 1
3. Indicate the elevation datum system used in determining the above reference level elev under Comments on Page 2). (NOTE: If the elevation datum used in measuring the el the FIRM [see Section B, Item 7], then convert the elevations to the datum system use equation under Comments on Page 2.)	evations is different than that used on ed on the FIRM and show the conversion
(d). FIRM Zone AO. The floor used as the reference level from the selected diagram is one) the highest grade adjacent to the building. If no flood depth number is available level) elevated in accordance with the community's floodplain management ordinance	e, is the building's lowest floor (reference e?
below \square (check one) the highest grade adjacent to the building.	
(c). FIRM Zone A (without BFE). The floor used as the reference level from the selected	
the selected diagram, is at an elevation of the selected diagram, is at an elevation of	
of <u>16</u> . <u>5</u> feet NGVD (or other FIRM datum–see Section B, Item 7). (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal stru	ictural member of the reference level from
2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor	from the selected diagram is at an elevation
. Using the Elevation Certificate Instructions, indicate the diagram number from the diagram describes the subject building's reference level <u>8</u> .	ams found on Pages 5 and 6 that best
	ams found on Pages 5 and 6 that best

1. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item	11
is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest	
floor" as defined by the ordinance is:	

2. Date of the start of construction or substantial improvement


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features–If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

SHROYER, INC.	STATE	``
SHROYER, INC.	STATE	
SHROYER, INC.	STATE	
5	STATE	
	FL	ZIP 34206
E PI 2/91 81	HONE 3-748-8080	
		E PHONE 2/91 813-748-8080 nce agent/company, and 3) building

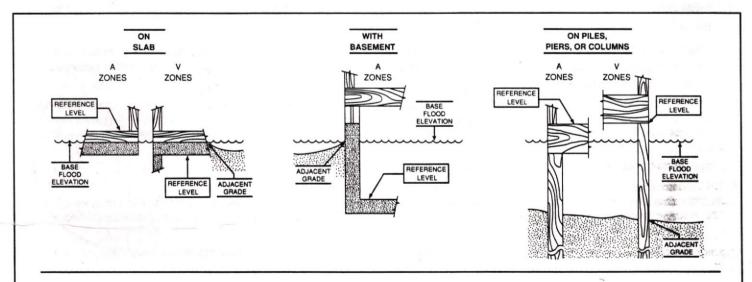

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones. Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.